





The company and the products

ETP Transmission AB have developed and manufactured hydraulic hub-shaft connections for more than 30 years, which are sold under the trademark ETP®. The company has built up a unique world wide knowledge within the hydraulic fastening and centering field.

Continuous development with customers has resulted in a steady flow of new products.

Electron beam welding is one of the key manufacturing operations, which gives the ETP-Product range its extreme levels of precision & repeatable performance.

The company has built up a leading position within three different business areas: general machine building (described in this brochure), industrial woodworking and metal machining.

Since 1995 the company is certified according to ISO 9001. Authorized representatives with stock and high levels of technical service are present in each country in Western Europe, North America, Japan, Australia, New Zealand, South-Africa, India and Southeast Asia.



Box 1120, SE-581 11 Linköping, Sweden
Tel. +46 (0)13 24 71 00, Fax +46 (0)13 24 71 90
E-mail: info@etp.se, Internet: www.etp.se

Pascal discovered the principle We put it to work

The scientist Blaise Pascal formulated the principle of pressure propagation in liquids many years ago:


"A liquid confined in a vessel which is subjected to pressure distributes the pressure uniformly upon the walls of the vessel."


ETP has explored the many positive qualities in this principle, developed it further and applied it to the hub-shaft connections.

"A hydraulic pressure medium confined in a double-walled sleeve is pressurized (with screws/pistons or with an external pump). The pressure is distributed evenly along and around hub/shaft. The double-walled sleeve expands uniformly and gives an even contact pressure against shaft and hub".

The ETP-Principle gives because of the hydraulic principle: compact design, fast mounting, easy to position, good runout, does not damage the contact surfaces and is easy to dismantle. These qualities are important today and will be even more important in the future.

With increasing requirements on down sizing the machines, better runout/balance, increased machine speeds, shorter downtime for service and increased precision, the ETP hydraulic hub-shaft connections are chosen for more and more designs.

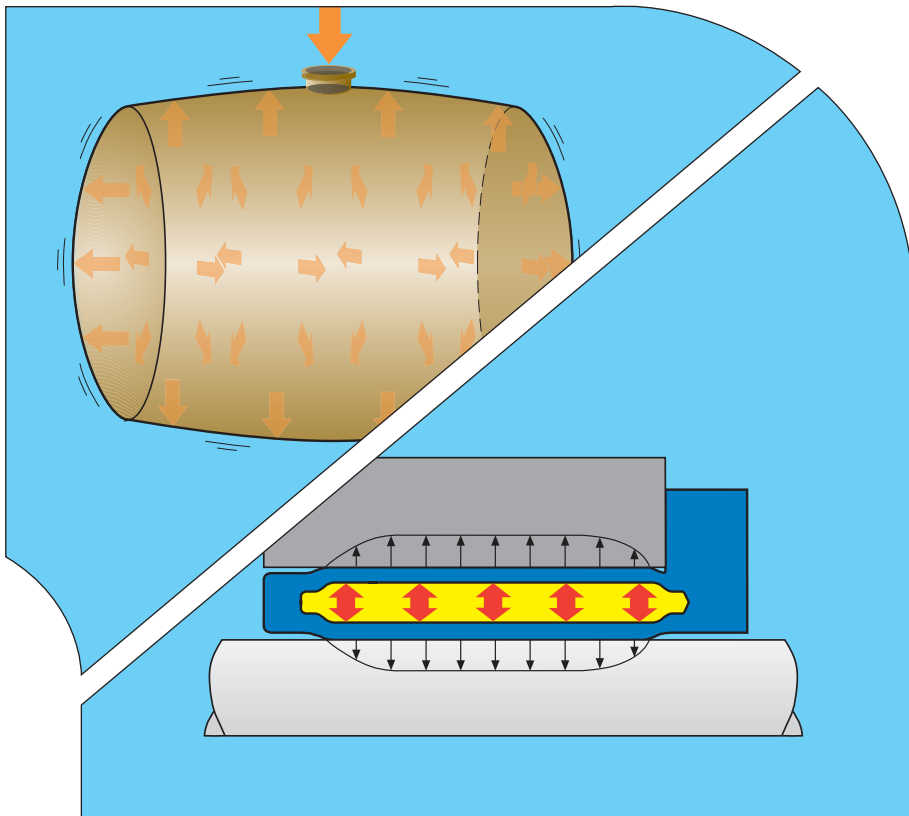

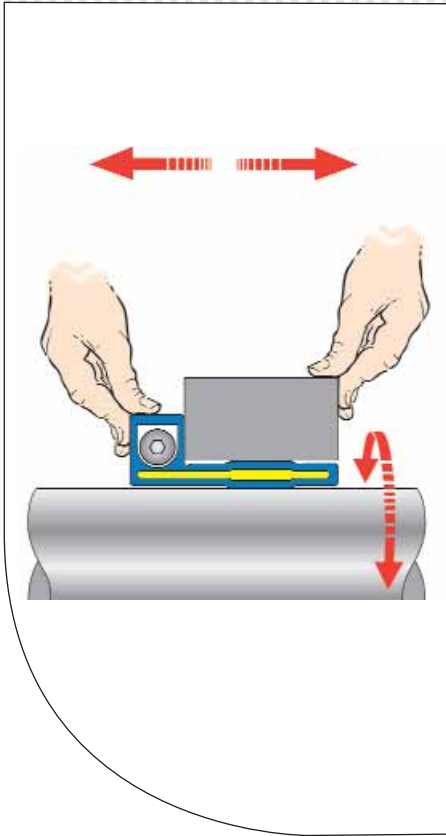


EASY AND ACCURATE TO POSITION

When starting the mounting/pressurizing, the double-walled sleeve will come in contact with the middle of the area on the hub and shaft first. In this situation it is still easy to turn, and axially move the ETP connection, around and along the shaft.

The hub is easy to position accurately in the required location and synchronize with other machine elements.


At continued pressurizing the double-walled sleeve only moves in the radial direction towards the hub and shaft, the adjusted position will be maintained. This means that time is saved as the mounting will be accurate and correct.

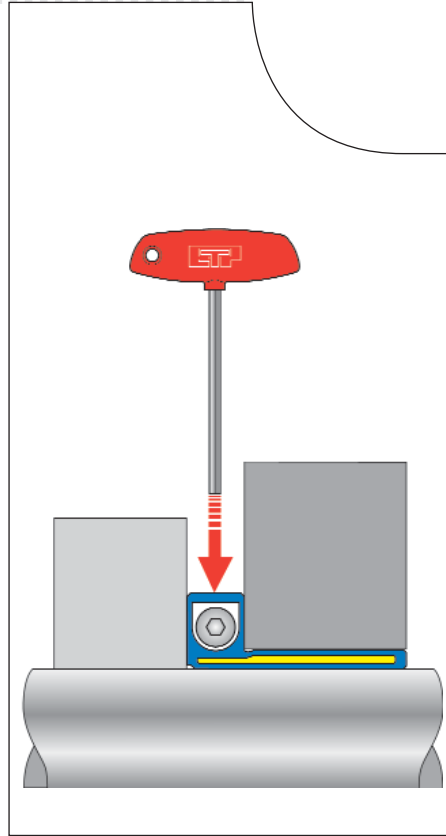

SAVES SPACE ALONG THE SHAFT

Some of the ETP connections have the pressure screw in the radial direction to the shaft. When the connections are in the radial direction, no space needs to be reserved along the shaft for mounting tools. An advantage with this is, another machine component can be placed all the way up against the flange of the ETP connection.

The minimal space needed for the flange makes a very compact design possible. All together this means reduced weight, smaller dimensions and lower polar moment of inertia for the final design.

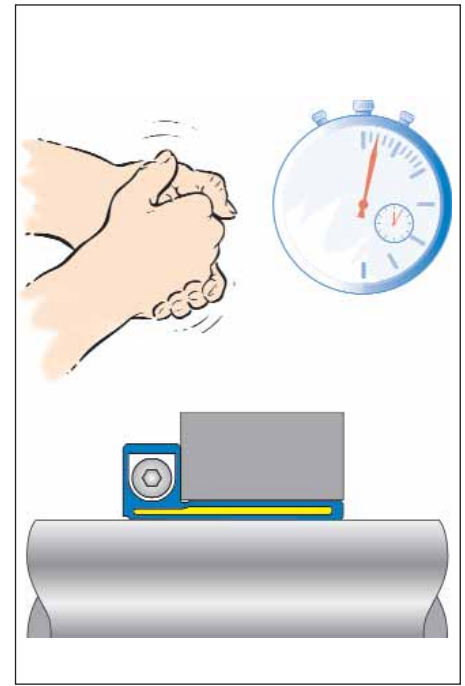


QUICK MOUNTING

Mounting of the hydraulic ETP connection is completed and ready within a few minutes. Only a few screws, for some ETP connections only one, need to be tightened to a low tightening torque.

The connection can immediately be subjected to a load. Tightening of the screws is not required afterwards.


The contact length onto the hub and shaft is long, so that the surface pressure can be kept at a moderate level. The low and even surface pressure means that the hub and shaft surfaces will not be damaged. This means that hubs of aluminium can be used.

The hydraulic ETP-principle gives advantages at design, manufacturing, mounting, operation and dismantling

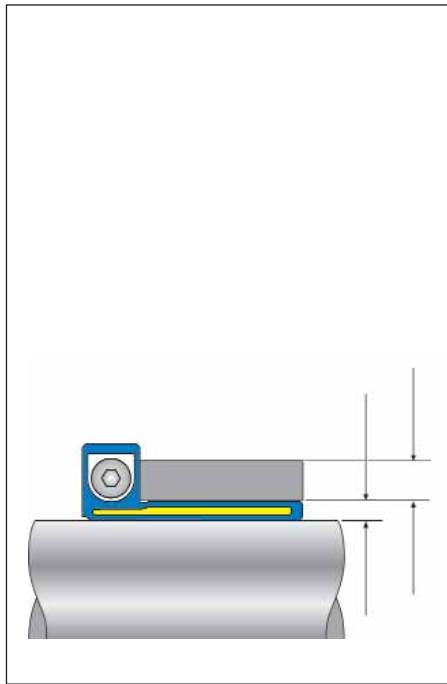


SMALL BUILT-IN DIMENSIONS

The ETP connections require a minimum of space. The double-walled sleeve is thin, the surface pressure is not high and even distributed towards shaft and hub. This makes it possible to minimize the outer diameter of the hub and to use simpler material with a low yield point. The ETP connections leads to reduced total weight and inertia. This makes it possible with quicker start and stops and thus increased productivity.

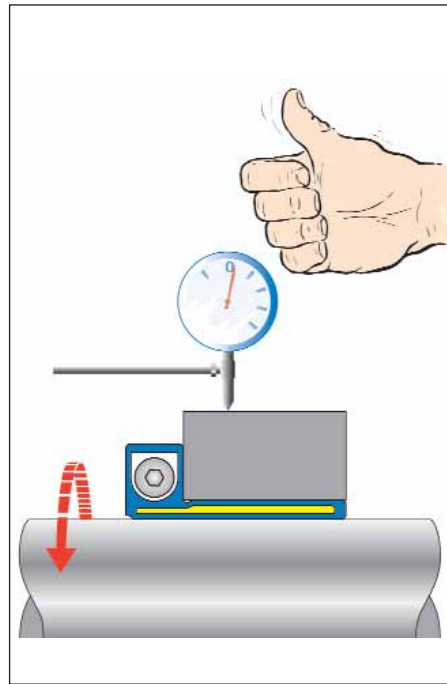

GOOD RUNOUT

The hydraulic principle coupled with our accurate machining makes the runout (axial and radial) and balance extremely good. The surface pressure is equal both around and along the shaft and hub. These hydraulic qualities means that the ETP connections give a minimum of vibrations, lower noise level and good precision also at high rpms. By repeated mountings the good runout will be maintained because of the hydraulic working principle.

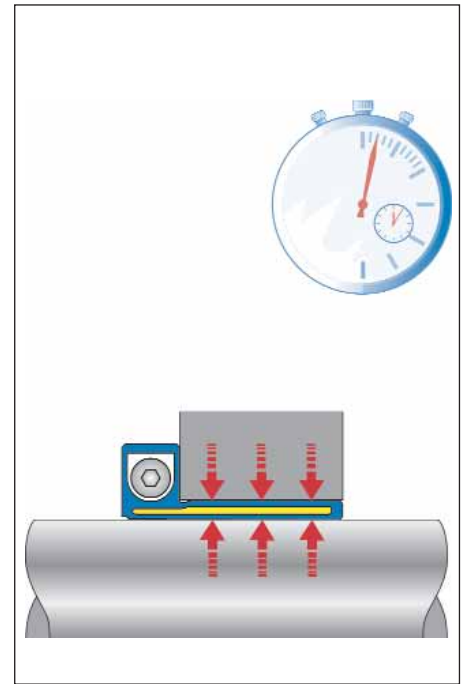

QUICK DISMANTLING

Dismantling the ETP connection, is as quick and easy as the mounting. When the screws are loosened, the hydraulic pressure reduces and disappears, the elastically pre-stressed double-walled sleeve returns to its original dimensions and can immediately be removed. The ETP connection can then be mounted as quick again, with the same good precision and performance as the first time. The downtime will be minimized.



DNV

**SS-EN
ISO 9001**



QUALITY IN DESIGN AND MANUFACTURE

At ETP all are aware about their responsibility for quality. To ensure that our designs meet the customers requirements, we collaborate closely with our sub-contractors and leading customers. When developing new products these are validated together with customers.

Production is planned and controlled so that quality and environmental requirements are fully met while maintaining high productivity. Monitoring is systematic and continuous. The quality system complies with the SS-EN ISO 9001–2000.

Choose the ETP-connection that suits you best

ETP-EXPRESS® incl. type R/C

- For fast mounting and compact design.
- Also in stainless and electroless Nickel coated.



Page
8-11

ETP-TECHNO®

- For extremely good concentricity.
- For frequent mounting.



Page
12-13

ETP-CLASSIC® incl. type R

- For all normal needs.
- Also in stainless.



Page
14-17

ETP-MINI™ incl. type R

- For small shafts.
- Also in stainless.



Page
18-19

ETP-HYLOC®

- For fast mounting and high loads.
- Good concentricity.



Page
20-21

ETP-OCTOPUS™

- Pressurize several connections simultaneously.
- External pressure source.



Page
22-23

ACCESSORIES

- Torque wrenches, pumps.
- Connections, screws.
- Friction increasing methods.



Page
24-26

TECHNICAL INFORMATION

- Design aids.
- Hub, tolerances, runout etc.
- Design tips.




Page
27-33

ETP-SPECIAL DESIGNS

- ETP-HYCON
- ETP-UNIGRIP, ETP-KN etc.



Page
33-35

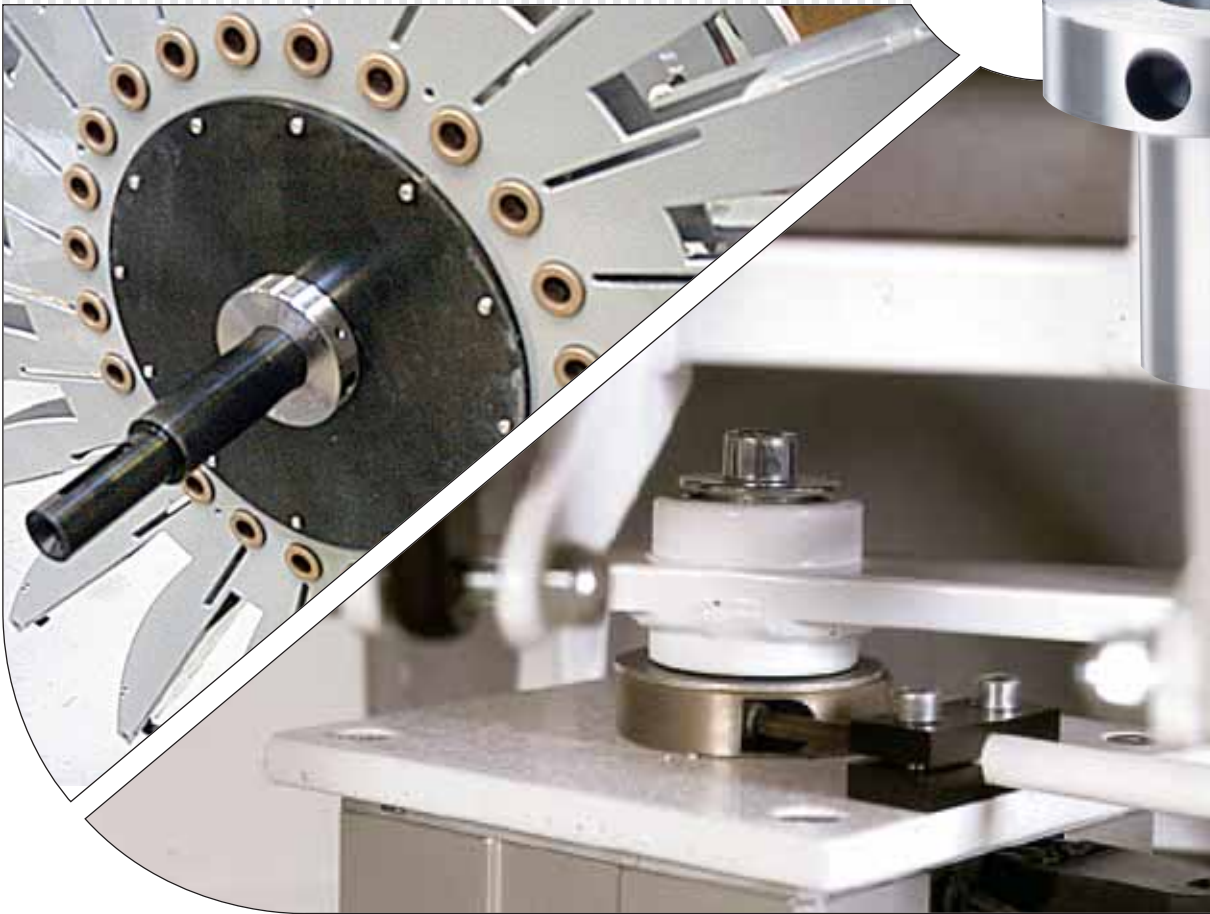

*ETP-EXPRESS has only **one screw** for pressurising, it is therefore specially designed for when there is a need for the repositioning of the hub to be done fast and accurately. The screw is tightened in the radial direction, this means that no space is used along the shaft for mounting tools. Other components can be mounted on the shaft all the way up to the flange. ETP-EXPRESS has extremely small built-in dimensions which makes a compact design possible.*

CONSTRUCTION

ETP-EXPRESS consists of a double-walled hardened steel sleeve filled with a pressure medium, and a flange. The flange part contains screw and piston with seals to maintain pressure.


OPERATION

When the pressure screw is tightened the double-walled sleeve expands uniformly against shaft and hub and creates a rigid joint. Dismantling is done by loosening the screw. ETP-EXPRESS returns to its original dimensions and can easily be dismantled.


QUALITIES

The unique hydraulic principle gives a great number of advantages:

- Extremely fast mounting/dismantling with only **one screw** ($d > 80$ mm, two screws).
- Radial tightening of the screw saves space along the shaft.
- Extremely small built-in dimensions.
- Accurate positioning, no axial movement when mounting.
- Good concentricity, also after several mountings.

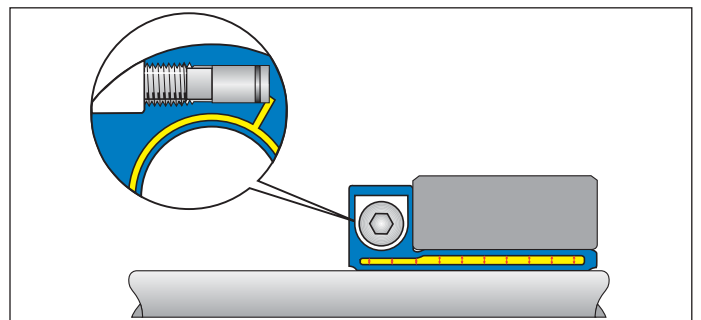

When the pressure screw is tightened to the recommended tightening torque, the piston has reached the bottom of the bore. ETP-EXPRESS has created a uniform surface pressure against the shaft and hub.

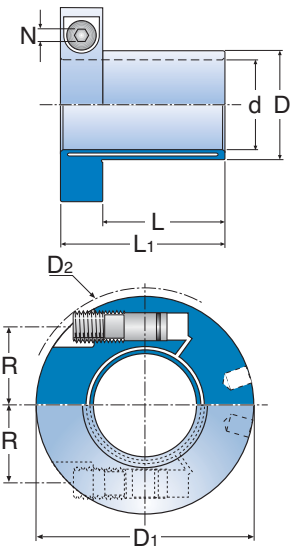

Notation ETP-EXPRESS XX

ETP-EXPRESS	Dimensions						Transmittable			Screws DIN 915, 12.9				Polar moment of inertia J kgm ² · 10 ⁻³	Weight kg
	d mm	D mm	D ₁ mm	D ₂ mm	L mm	L ₁ mm	torque Tr Nm	axial force Fr kN	radial force FR kN	Dim.	R mm	N mm	Tt Nm		
15	15	18	46	48,9	25	39	46	5,1	0,5	M10	15,1	5	5	0,043	0,16
5/8"	15,875	19	47	49,8	26	40	53	5,5	0,5	M10	15,6	5	5	0,047	0,17
19	19	23	50,5	53,0	28	42	85	7,3	1	M10	17,4	5	5	0,064	0,20
3/4"	19,05	23	50,5	53,0	28	42	85	7,3	1	M10	17,4	5	5	0,064	0,20
20	20	24	51,5	54,1	30	44	110	9,1	1	M10	18	5	5	0,070	0,21
22	22	27	55,5	60,5	32	46	130	9,6	1,2	M10	19,3	5	5	0,097	0,25
7/8"	22,225	27	55,5	60,5	32	46	130	9,6	1,2	M10	19,3	5	5	0,097	0,25
24	24	29	57,5	62,3	33	47	190	13	1,4	M10	20,3	5	5	0,112	0,27
25	25	30	58	62,9	35	49	230	15	1,5	M10	20,8	5	5	0,117	0,27
1"	25,4	31	59	63,8	35	49	190	12	1,5	M10	21,2	5	5	0,127	0,29
28	28	34	63	69,6	38	52	280	16	1,8	M10	22,6	5	5	0,170	0,34
1 1/8"	28,575	35	63,5	70,1	39	53	290	16	1,8	M10	23	5	5	0,180	0,35
30	30	36	64,5	71,0	40	54	380	21	2	M10	23,6	5	5	0,189	0,35
1 1/4"	31,75	39	68,5	77,7	42	56	430	22	2,2	M10	24,8	5	5	0,249	0,42
32	32	39	68,5	77,7	42	56	440	22	2,2	M10	24,8	5	5	0,249	0,42
1 3/8"	34,925	42	73	85,1	45	59	640	30	2,5	M10	26,4	5	5	0,325	0,48
35	35	42	73	85,1	45	59	640	30	2,5	M10	26,4	5	5	0,325	0,48
1 7/16"	36,5125	44	74,5	86,6	48	62	740	33	2,6	M10	27,3	5	5	0,365	0,52
38	38	46	84,5	89,5	52	72	890	38	2,8	M16	31	8	21	0,761	0,84
1 1/2"	38,1	46	84,5	89,5	52	72	890	38	2,8	M16	31	8	21	0,761	0,84
40	40	48	86,5	91,2	55	75	1100	45	3	M16	32	8	21	0,844	0,88
42	42	51	89	93,5	56	76	1100	43	3,2	M16	33,2	8	21	0,971	0,96
1 3/4"	44,45	54	93	100,3	58	78	1400	51	3,5	M16	34,8	8	21	1,201	1,10
45	45	54	93	100,3	58	78	1400	51	3,5	M16	34,8	8	21	1,170	1,05
48	48	59	97	103,8	59	79	1700	57	4	M16	36,8	8	21	1,458	1,21
1 15/16"	49,2125	60	98,5	105,1	60	80	1900	63	4,3	M16	37,5	8	21	1,571	1,27
50	50	60	98,5	105,1	60	80	1900	63	4,5	M16	37,5	8	21	1,524	1,20
2"	50,8	61	101,5	111,8	60	80	1900	62	4,5	M16	38	8	21	1,716	1,28
55	55	67	106	115,9	65	85	2400	71	5	M16	40,5	8	21	2,182	1,50
60	60	73	115,5	132,7	70	90	3300	90	5,3	M16	43,3	8	21	3,167	1,85
2 1/2"	63,5	77	119	134,6	73	93	4000	105	5,4	M16	45,1	8	21	3,736	2,04
65	65	79	120,5	137,1	75	95	4400	112	5,6	M16	46,1	8	21	4,003	2,13
70	70	85	135,5	153,9	85	109	5600	130	6,4	M20	50,8	10	39	7,125	3,04
3"	76,2	92	141,5	157,8	91	115	7500	160	7	M20	54,1	10	39	9,01	3,48
80	80	97	145,5	162,6	95	119	8700	180	7,5	M20	56,3	10	39	10,350	3,75
90	90	109	155,5	171,7	105	129	12000	220	8,6	2 x M20	61,8	10	39	15,20	4,80
100	100	121	166	181,0	115	139	17000	280	9,7	2 x M20	67,3	10	39	21,90	5,90

Tr= Transmittable torque when axial force is 0.
 Fr= Transmittable axial force when torque is 0.
 FR=Max transmittable radial force at continuous operation.
 Tt= Recommended tightening torque for the screw/screws.

The dimensions are valid for ETP-EXPRESS before mounting.

Dimensions subject to alterations without notice.

TOLERANCES

Shaft h7 for d=15 mm.

Shaft h8 for d= 5/8", 3/4", 20, 7/8", 25, 1", 1 1/8", 30, 1 1/4", 1 3/8", 35, 1 7/16", 1 1/2", 40, 1 3/4", 45, 1 15/16", 50, 2", 60, 2 1/2", 65, 70, 3", 80, 90, 100 mm.

Shaft k6-h7 for d= 19, 22, 24, 28, 32, 38, 42, 48, 55 mm.

Hub H7.

For further information see under the section for technical information and tolerances.

TIGHTENING TORQUE

When the tightening torque, Tt, is reached the piston is at the end of the bore. Further tightening does not increase the pressure.

Runout, balance, number of mountings, hub/hollow shaft, fatigue, temperature and radial loads/bending torque.

See the section for technical information.



The demand from the food and process industries is increasing for stainless steel hub-shaft connections; surface coatings and plating are no longer always sufficient. The most common sizes of ETP-EXPRESS are available in stainless steel as well as plated with a thick layer of electroless Nickel.

CONSTRUCTION

ETP-EXPRESS type R is made of hardened stainless steel. ETP-EXPRESS C is plated with electroless Nickel, approx. 15 μm , containing also a high proportion of phosphor. The screw for both products is in stainless steel.

OPERATION

ETP-EXPRESS type R and C work in the same way as ETP-EXPRESS.


For type C the following applies:

- The transmittable torque is reduced because of the lower friction coefficient for Nickel.
- Cleaning of the contact surfaces must be more carefully done before mounting.
- If also the shaft or hub is plated with Nickel the transmittable torque will be reduced by 50 %.

QUALITIES

- ETP-EXPRESS type R and C have the same good qualities when it comes to fast and frequent mounting with only **one screw** in the radial direction, small built-in dimensions etc. as the standard ETP-EXPRESS.
- All parts exposed to the environment are made of stainless steel (type R) or plated with Nickel (type C).


- Easy to clean. In food processing this meets essential requirements.
- The pressure medium and lubricant for the screw are approved for use in the food industry.

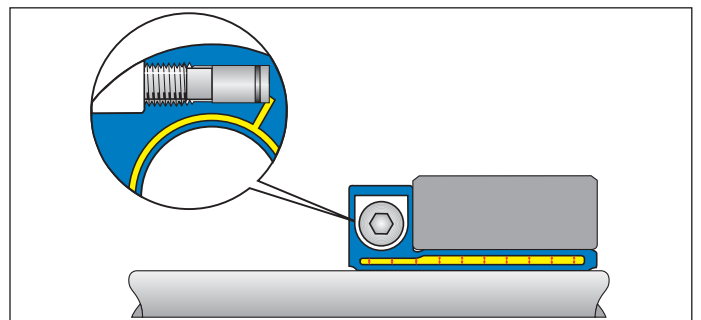

When the pressure screw is tightened to the recommended tightening torque, the piston has reached the bottom of the bore. ETP-EXPRESS type R and C will have created a uniform surface pressure against the shaft and hub.



ETP-EXPRESS® R/C

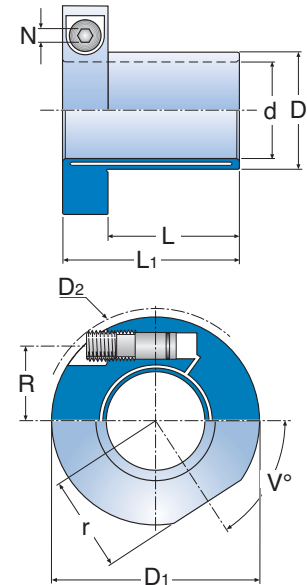

Notation ETP-EXPRESS R-XX
ETP-EXPRESS C-XX

ETP-EXPRESS	Dimensions								Transmittable axial force radial force torque			Screw*) DIN 915, A4				Polar moment of inertia J kgm ² · 10 ⁻³	Weight kg
	d mm	D mm	D ₁ mm	D ₂ mm	L mm	L ₁ mm	r mm	v°	Tr Nm	Fr kN	FR kN	Dim.	R mm	N mm	Tt Nm		
STAINLESS																	
R-15	15	18	46	48,9	25	39	19,9	53	46	5,1	0,5	M10	15,1	5	5	0,043	0,16
R-5/8"	15,875	19	47	49,8	26	40	20,3	54	53	5,5	0,5	M10	15,6	5	5	0,047	0,17
R-3/4"	19,05	23	50,5	53,0	28	42	21,9	55	85	7,3	1	M10	17,4	5	5	0,064	0,20
R-20	20	24	51,5	54,1	30	44	22,6	56	110	9,1	1	M10	18	5	5	0,070	0,21
R-7/8"	22,225	27	55,5	60,5	32	46	24,4	57	130	9,6	1	M10	19,3	5	5	0,097	0,25
R-25	25	30	58	62,9	35	49	25,8	58	230	15	1,5	M10	20,8	5	5	0,117	0,27
R-1"	25,4	31	59	63,8	35	49	26,1	58	190	12	1,5	M10	21,2	5	5	0,127	0,29
R-1 1/8"	28,575	35	63,5	70,1	39	53	28,5	59	290	16	1,8	M10	23	5	5	0,18	0,35
R-30	30	36	64,5	71,0	40	54	29,1	59	380	21	2	M10	23,6	5	5	0,189	0,35
R-1 1/4"	31,75	39	68,5	77,7	42	56	31,1	58	430	22	2,2	M10	24,8	5	5	0,249	0,42
R-1 3/8"	34,925	42	73	85,1	45	59	31,9	60,5	640	30	2,5	M10	26,4	5	5	0,312	0,47
R-35	35	42	73	85,1	45	59	33,7	58	640	30	2,5	M10	26,4	5	5	0,325	0,48
R-1 1/2"	38,1	46	84,5	89,5	52	72	36,6	58	890	38	2,8	M16	31	8	21	0,761	0,84
R-40	40	48	86,5	91,2	55	75	37,7	59	1100	45	3	M16	32	8	21	0,844	0,88
R-1 3/4"	44,45	54	93	100,3	58	78	41,1	61	1400	51	3,5	M16	34,8	8	21	1,187	1,08
R-45	45	54	93	100,3	58	78	41,1	59	1400	51	3,5	M16	34,8	8	21	1,170	1,05
R-1 15/16"	49,2125	60	98,5	105,1	60	80	43,7	62	1900	63	4,5	M16	37,5	8	21	1,546	1,25
R-50	50	60	98,5	105,1	60	80	43,7	60	1900	63	4,5	M16	37,5	8	21	1,524	1,20
R-2"	50,8	61	101,5	111,8	60	80	45,2	60	1900	62	4,5	M16	38	8	21	1,716	1,28
R-60	60	73	115,5	132,7	70	90	53,3	59	3300	90	5,3	M16	43,3	8	21	3,167	1,85
R-70	70	85	135,5	153,9	85	109	62	59	5600	130	6,4	M20	50,8	10	39	7,125	3,04
R-80	80	97	145,5	162,6	95	119	65,9	61	8700	180	7,5	M20	56,3	10	39	10,35	3,75
NICKEL COATED																	
C-15	15	18	46	48,9	25	39	19,9	53	34	3,8	0,5	M10	15,1	5	5	0,043	0,16
C-20	20	24	51,5	54,1	30	44	22,6	56	82	6,8	1	M10	18	5	5	0,070	0,21
C-25	25	30	58	62,9	35	49	25,8	58	172	11	1,5	M10	20,8	5	5	0,117	0,27
C-30	30	36	64,5	71,0	40	54	29,1	59	285	15	2	M10	23,6	5	5	0,189	0,35
C-40	40	48	86,5	91,2	55	75	37,7	59	825	33	3	M16	32	8	21	0,844	0,88
C-50	50	60	98,5	105,1	60	80	43,7	60	1425	47	4,5	M16	37,5	8	21	1,524	1,20

Tr= Transmittable torque when axial force is 0. } When the screw is tightened to Tt.
Fr= Transmittable axial force when torque is 0.
FR=Max transmittable radial force at continuous operation.
Tt= Recommended tightening torque for the screw.

The dimensions are valid for ETP-EXPRESS R and C before mounting.

Dimensions subject to alterations without notice.

TOLERANCES

Shaft h8 (R-15 and C-15 only h7)
Hub H7.

For further information see under the section for technical information and tolerances.

MATERIAL

Type R: Euronorm 1.4057, stainless steel, X19CrNi17-2.

Type C: steel, coated with 15 µm electroless Nickel with high proportion of phosphor.

For rate of corrosion, see page 31.

*)Screw: coated for a low and even friction in the threads.

MOUNTING ADVICE

Make sure the screw thread is well lubricated (OKS 260 or Molykote D) before each mounting.

Runout, balance, number of mountings, hub/hollow shaft, fatigue, temperature and radial loads/bending torque.
See the section for technical information.



*ETP-TECHNO is specially designed for applications where fast frequent changes or adjustments, with high precision are needed. ETP-TECHNO can be mounted/dismantled 1000's of times. It is very easy to mount, only **one screw**, ETP-TECHNO in a tight space, and it also has extremely good concentricity. ETP-TECHNO is the high precision joint among the ETP hub-shaft connections.*

CONSTRUCTION

ETP-TECHNO consists of a double-walled hardened steel sleeve filled with a pressure medium, and a flange. The flange part contains the pressurizing mechanism which consists of a screw and piston with double sealing function, an o-ring and a metallic seal with a steel ball which is pressed against a spherical seating.

The outer, D, and inner, d, diameter and the side of the flange towards the hub are accurately machined for extremely good concentricity.

The piston and the cylinder are designed for 1000's of mountings.

OPERATION

When the pressure screw is tightened the double-walled sleeve expands uniformly against the shaft and the hub thus creating a rigid joint. Dismantling of the joint is done by loosening the screw. ETP-TECHNO returns to its original measurements and can easily be dismantled.


QUALITIES

The unique hydraulic principle gives a great number of advantages:


- Fast mounting/dismantling. Only **one screw** needs to be tightened.
- Extremely good concentricity, also after several mountings.
- Can be mounted/dismantled 1000's of times.

- Possible to mount in tight spaces. The pressure screw is tightened in the radial direction to the shaft.
- Small built-in dimensions.
- The hub can be adjusted easily and accurately.

ETP-TECHNO is also suitable as a base for customer adapted solutions. See the section for ETP-Special designs.

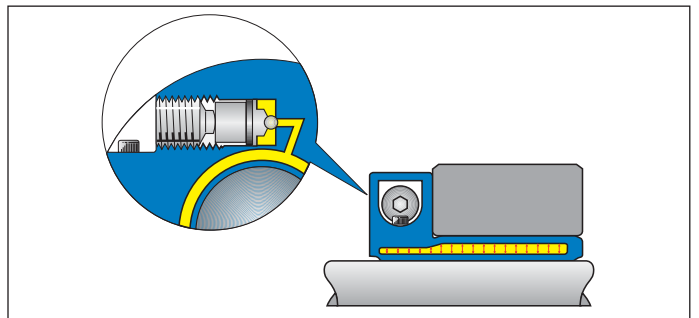

When the pressure screw is tightened to the recommended tightening torque, T_t , the steel ball seals against the spherical seating. ETP-TECHNO will have created a uniform surface pressure against the shaft and hub.

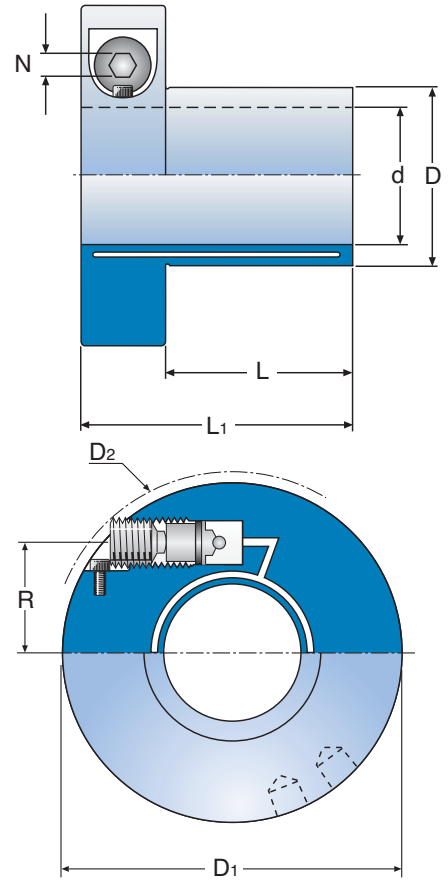

Notation ETP-TECHNO XXX

ETP-TECHNO	Dimensions						Transmittable axial force			Screws				Polar moment of inertia J kgm ² · 10 ⁻³	Weight kg
	d mm	D mm	D ₁ mm	D ₂ mm	L mm	L ₁ mm	Tr Nm	Fr kN	Fr kN	Dim.	R mm	N mm	Tt Nm		
15	15	19	52	55	25	41	40	5	1	M12	16	6	10	0,092	0,25
20	20	25	59	63	30	46	120	12	2	M12	19	6	10	0,153	0,32
25	25	32	70	73	35	55	290	23	3	M14	24	6	16	0,382	0,58
1"	25,4	32	70	73	35	55	290	23	3	M14	24	6	16	0,382	0,58
30	30	38	76	80	40	60	500	33	4	M14	26,5	6	16	0,541	0,69
1 1/4"	31,75	41	79	85	42	62	600	37	4	M14	27,5	6	16	0,641	0,78
32	32	41	79	85	42	62	600	37	4	M14	27,5	6	16	0,641	0,78
35	35	44	82	89	45	65	800	45	5	M14	29	6	16	0,752	0,84
1 1/2"	38,1	50	90	96	50	70	880	57	5	M16	32,5	8	24	1,138	1,08
40	40	52	92	98	55	75	1200	60	6	M16	33,5	8	24	1,267	1,18
45	45	56	96	103	58	78	1550	68	7	M16	35,5	8	24	1,503	1,24
50	50	65	105	114	60	80	2000	80	9	M16	39,5	8	24	2,313	1,62
60	60	75	122	130	70	95	4000	133	12	M20	46,5	10	40	5,027	2,51
70	70	90	138	153	85	110	6500	186	13	M20	52	10	40	8,854	3,65
75	75	95	146	162	90	115	7800	208	14	M20	56	10	40	11,600	4,20
80	80	100	154	170	95	120	9000	225	15	M20	58	10	40	14,370	4,77
90	90	112	170	187	105	133	13000	288	17	M22	64,5	10	60	24,062	6,48
100	100	125	184	202	115	145	18000	360	19	M24	72	12	80	37,013	8,41

Tr= Transmittable torque when axial force is 0.
 Fr= Transmittable axial force when torque is 0.
 Fr=Max transmittable radial force at continuous operation.
 Tt= Recommended tightening torque for the screw.

The dimensions are valid for ETP-TECHNO before mounting.

Dimensions subject to alterations without notice.

TOLERANCES

Shaft h8.

Hub H7.


For further information see under the section for technical information and tolerances.

Runout, balance, number of mountings, hub/hollow shaft, fatigue, temperature and radial loads/bending torque.

See the section for technical information.

TIGHTENING TORQUE

When the tightening torque, Tt, is reached the piston is at the end of the bore. Further tightening does not increase pressure.

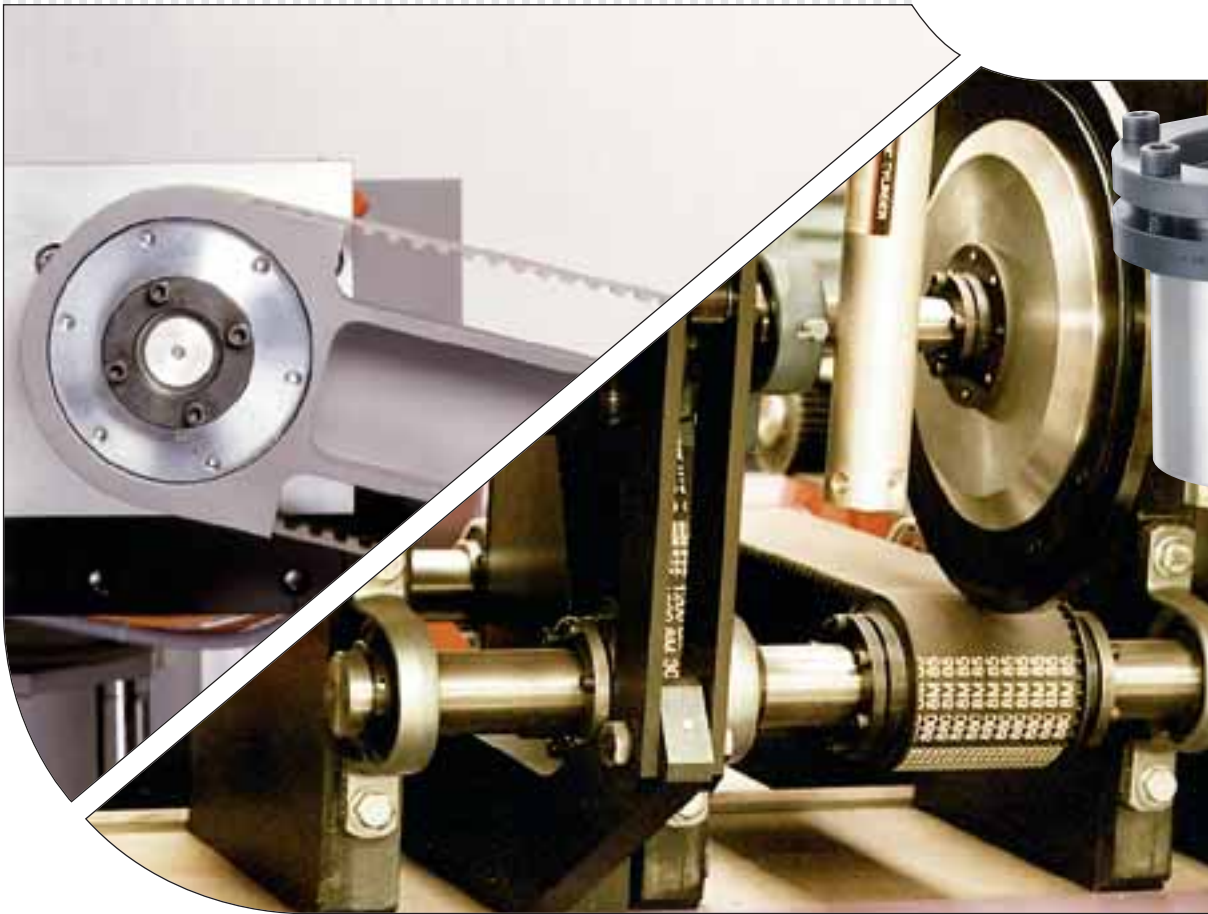

ETP-CLASSIC is used in a large variety of applications, for mounting timing belt pulleys, camcurves and arms etc. Positioning along and between the shafts is easy and fast with a high precision. Service and maintenance are also quick because of the easy dismantling. ETP-CLASSIC is recommended for all normal needs.

CONSTRUCTION

ETP-CLASSIC consists of a double-walled hardened steel sleeve, filled with a specially adopted pressure medium, sealing ring, piston, pressure flange and clamping screws.


OPERATION

When tightening the screws, the sleeve expands uniformly against hub and shaft and creates a rigid joint. When loosening the screws, the sleeve returns to its original measurements and can easily be dismantled.


QUALITIES

The unique hydraulic principle gives a great number of advantages:

- Small built-in dimensions and a reasonable surface pressure means small outside diameter for the hub.
- Mounting and dismantling is fast.
- Fine adjustment of the hub can be made during mounting.
- Low tightening torque and a small number of screws makes the mounting easy.
- Good concentricity, also after several mountings.
- ETP-CLASSIC has cap head screws but screws with hex head are available as accessories, see page 24.

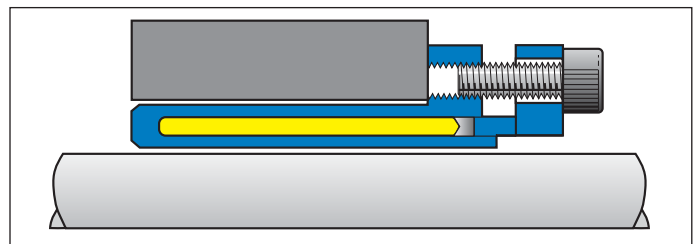


ETP-CLASSIC in place between the shaft and hub ready for mounting.

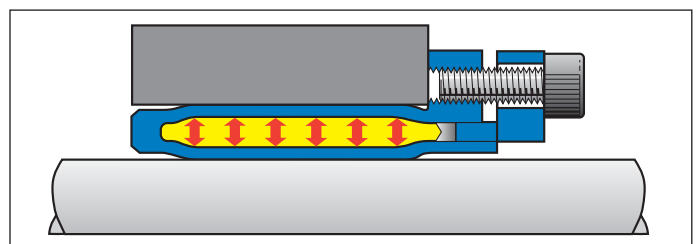

When the screws have been tightened, ETP-CLASSIC creates an even surface pressure against the hub and shaft along virtually the entire length.

ETP-CLASSIC®

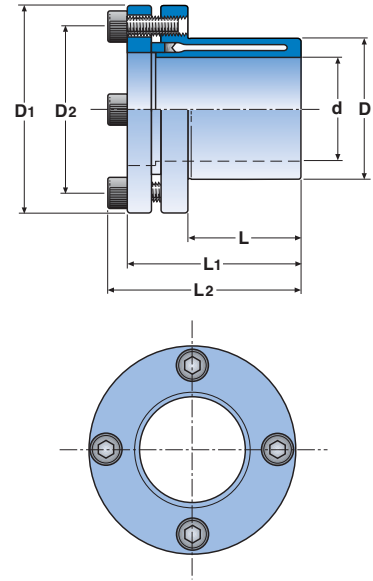

Notation ETP-CLASSIC XXX

ETP-CLASSIC	Dimensions							Transmittable torque			Screws DIN 912, 12.9			Polar moment of inertia J kgm ² · 10 ⁻³	Weight kg
	d mm	D mm	D ₁ mm	D ₂ mm	L mm	L ₁ mm	L ₂ mm	Tr Nm	Fr kN	FR kN	No.	Dim.	Tt Nm		
15	15	23	38	28,5	17	30	35	55	7,3	2,5	3	M5	6	0,019	0,10
19	19	28	45	35	21	37	42	100	10,6	5,8	3	M5	8	0,045	0,17
20	20	28	45	35	22	37	42	125	12,5	6,6	3	M5	8	0,043	0,16
22	22	32	49	40	22	37	42	135	12,3	8,2	4	M5	8	0,063	0,20
24	24	34	49	40	25	40	45	200	16,7	9,8	4	M5	8	0,066	0,20
25	25	34	49	40	27	43	48	250	20,0	10,6	4	M5	8	0,067	0,20
28	28	39	55	46	29	45	50	300	21,4	13,1	4	M5	8	0,112	0,27
30	30	41	57	47,5	32	47	52	420	28,0	14,7	4	M5	8	0,133	0,30
32	32	43	60	50,5	34	52	57	420	26,3	16,3	4	M5	8	0,180	0,35
35	35	47	63	53,5	37	55	60	650	37,1	18,8	6	M5	8	0,230	0,41
38	38	50	65	56	41	59	64	750	39,5	21,2	6	M5	8	0,277	0,44
40	40	53	70	60,5	43	63	68	940	47,0	22,8	6	M5	8	0,408	0,57
42	42	55	70	60,5	45	65	70	940	44,8	24,4	6	M5	8	0,414	0,56
45	45	59	77	66,5	49	69	75	1290	57,3	26,9	6	M6	13	0,636	0,73
48	48	62	80	69,5	52	73	79	1570	65,4	29,3	6	M6	13	0,761	0,80
50	50	65	83	72,5	53	76	82	1900	76,0	30,9	6	M6	13	0,943	0,91
55	55	71	88	78	58	82	88	2500	90,9	35,0	8	M6	13	1,301	1,09
60	60	77	95	84,5	64	90	96	3400	113	39,1	8	M6	13	1,959	1,40
65	65	84	102	91	68	96	102	3500	108	43,1	8	M6	13	2,780	1,72
70	70	90	113	99	72	99	107	5200	149	47,2	6	M8	32	4,035	2,09
75	75	95	118	104	85	114	122	6300	168	51,3	6	M8	32	5,500	2,51
80	80	100	123	109	90	120	128	8800	220	55,0	6	M8	32	8,100	2,68
85	85	106	129	115	95	125	133	8800	207	58,0	6	M8	32	9,500	3,09
90	90	112	135	121	100	133	141	11000	244	60,0	8	M8	32	12,200	3,52
95	95	120	143	129	105	139	147	12800	269	61,5	8	M8	32	17,100	4,46
100	100	125	148	134	110	145	153	15500	310	62,0	8	M8	32	19,950	4,87

Tr= Transmittable torque when axial force is 0.
Fr= Transmittable axial force when torque is 0.
FR= Max transmittable radial force at continuous operation.
Tt= Recommended tightening torque for the screws.

The dimensions are valid for ETP-CLASSIC before mounting.

Dimension subject to alterations without notice.

TOLERANCES

Shaft h8 – k6 (size 15 only h7)

Hub H7


For further information see the section for technical information and tolerances.

Runout, balance, number of mountings, hub/hollow shaft, fatigue, temperature and radial loads/bending torque.

See the section for technical information.

VERSIONS

Also available in a complete range of inch sizes 3/4" – 4", and in a shorter version for shafts 19 – 50 mm, see page 34.

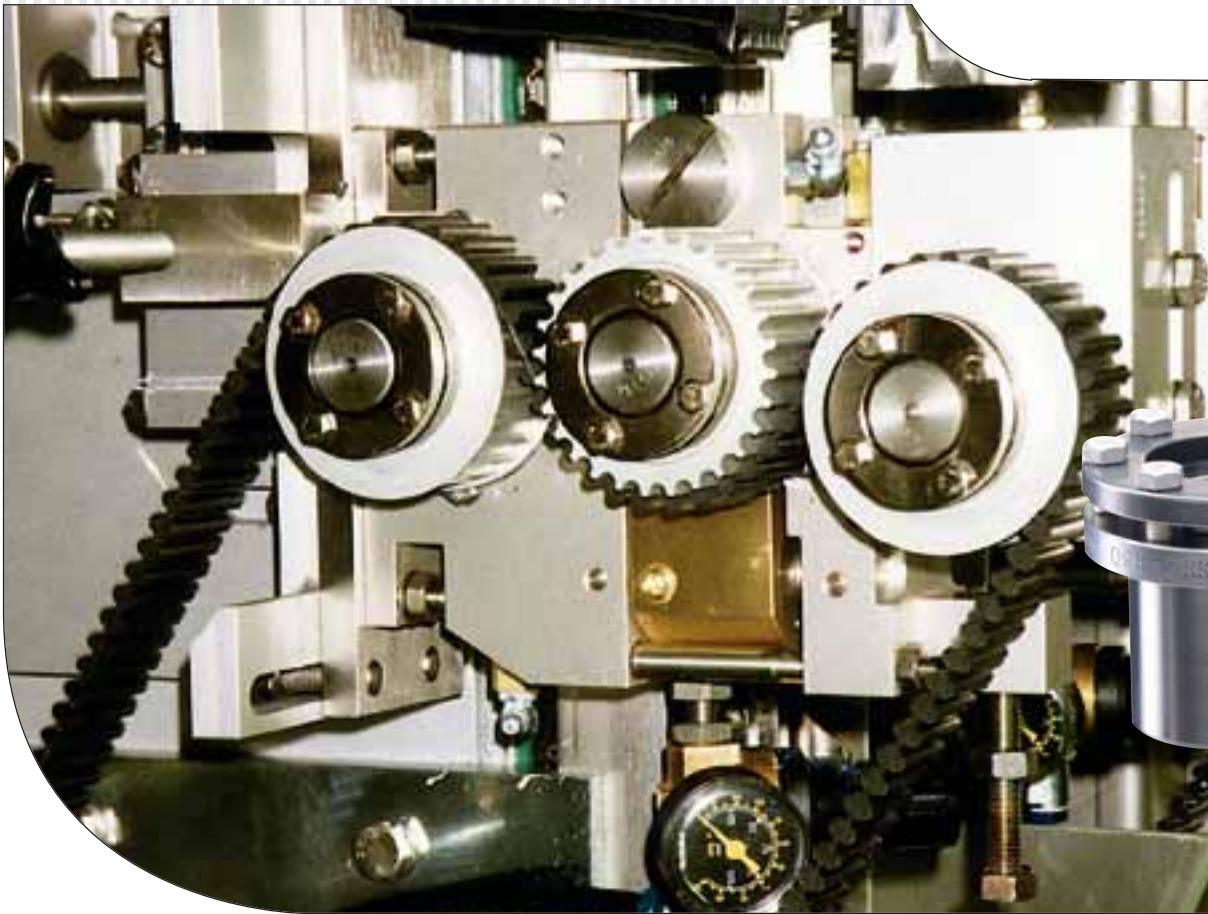

The demand from the food and process industries is increasing for stainless steel hub-shaft connections; surface coatings and plating are not always sufficient. The most common sizes of ETP-CLASSIC are also available in stainless steel.

CONSTRUCTION

ETP-CLASSIC type R is the normal type of ETP-CLASSIC made of stainless steel.

Type R has hexhead stainless steel screws, in order to facilitate easy cleaning when used for example in machines for processing food.


OPERATION

ETP-CLASSIC type R works in the same way as ETP-CLASSIC with a few exceptions:


- There are a few more screws in type R as the tightening torque is lower for stainless steel screws.
- The transmittable torque is lower.

QUALITIES

- ETP-CLASSIC type R has the same qualities as ETP-CLASSIC when it comes to fast/backlash free mounting and positioning.
- All parts exposed to the environment are made of stainless steel. In food processing this meets essential requirements.



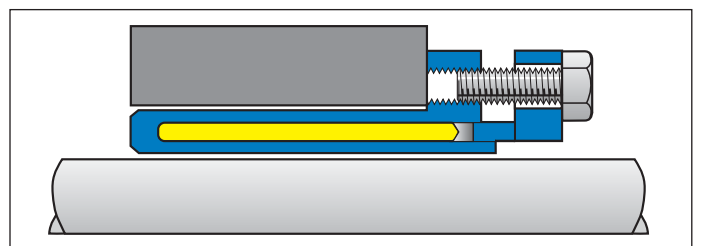


ETP-CLASSIC type R; in place between the shaft and hub ready for mounting.

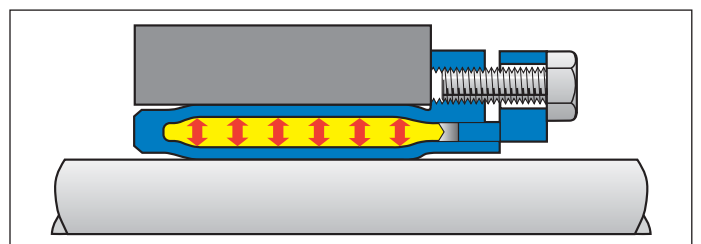

When the screws have been tightened, ETP-CLASSIC type R will create an even surface pressure against the hub and shaft along virtually the entire length.

ETP-CLASSIC® R

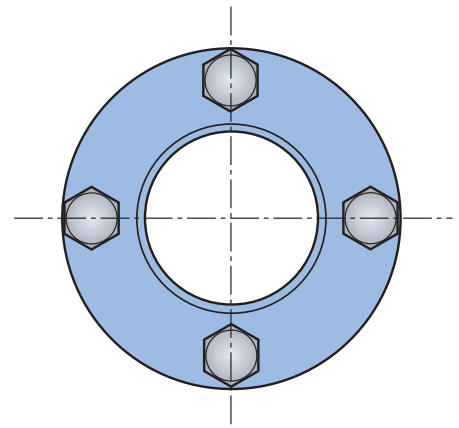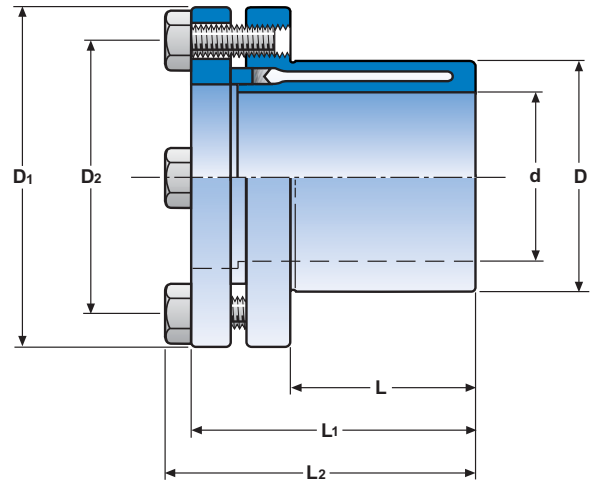

Notation ETP-CLASSIC R-XX

ETP-CLASSIC	Dimensions							Transmittable			Screws*) DIN 933, A4			Polar moment of inertia J $\text{kgm}^2 \cdot 10^{-3}$	Weight kg
	d mm	D mm	D ₁ mm	D ₂ mm	L mm	L ₁ mm	L ₂ mm	torque Tr Nm	axial force Fr kN	radial force FR kN	Ant.	Dim.	Tt Nm		
R-15	15	23	38	28,5	17	30	34	45	6,0	2,5	4	M5	4,5	0,019	0,10
R-20	20	28	45	35	22	37	41	100	10,0	6,6	5	M5	4,5	0,044	0,16
R-25	25	34	49	40	27	43	47	210	16,8	10,6	7	M5	4,5	0,070	0,21
R-30	30	41	57	47,5	32	47	51	350	23,3	14,7	7	M5	4,5	0,137	0,30
R-35	35	47	63	53,5	37	55	59	500	28,5	18,8	9	M5	4,5	0,234	0,41
R-40	40	53	70	60,5	43	63	67	750	37,5	22,8	9	M5	4,5	0,414	0,58
R-45	45	59	77	66,5	49	69	73	1100	48,8	26,9	9	M6	7,8	0,647	0,74
R-50	50	65	83	72,5	53	76	80	1550	62,0	30,9	9	M6	7,8	0,957	0,92

Tr= Transmittable torque when axial force is 0.
 Fr= Transmittable axial force when torque is 0.
 FR=Max transmittable radial force at continuous operation.
 Tt= Recommended tightening torque for the screws.

When the screws are tightened to Tt. The dimensions are valid for ETP-CLASSIC R before mounting.

Dimension subject to alterations without notice.

TOLERANCES

Shaft h8 (R-15 only h7).
Hub H7.

For further information see under the section for technical information and tolerances.

MATERIAL

Euronorm 1.4568, stainless steel,
X7CrNiAl17-7.

*)Screws: surface coated for a low and even friction in the threads.

MOUNTING ADVICE

Make sure that the screw threads are well lubricated (OKS 260 or Molykote D) before each mounting.

Runout, balance, number of mountings, hub/hollow shaft, fatigue, temperature and radial loads/bending torque.
See the section for technical information.



ETP-MINI is far superior to keyways or setscrews because it allows an adjustable, backlash free joint. Typical applications are mounting of hubs on small electrical motors, steppermotors and encoders. As no keyways are needed, the shaft will not be weakened and the unbalance will be lower, which is very important at high speeds, as the motor bearings are sensitive to vibrations. Also available in stainless, ETP-MINI type R, suitable for the food processing industry etc.

CONSTRUCTION

ETP-MINI consists of two, partly slotted, conical steel sleeves (type R stainless) and clamping screws (type R stainless).


OPERATION

By tightening the screws, the inner sleeve is pressed against the shaft and the outer sleeve against the hub, thus forming a rigid joint.


When dismantling, one or if necessary, two of the screws are moved to the threaded dismantling holes in the flange. By tightening, the sleeves will separate and the joint will loosen. ETP-MINI type R has one screw more than the normal ETP-MINI in order to transmit the same torque (lower tightening torque for stainless screws). The built-in dimensions are the same.

QUALITIES


- Easy to mount.
- Good runout.
- Allows wide tolerances.
- Available in stainless steel (type R).
- ETP-MINI R has stainless cap head screws but stainless hex head screws are available as accessories, see page 24.

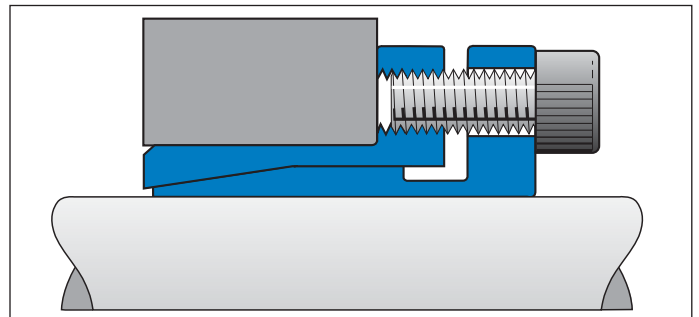

The inner sleeve, for ETP-MINI incl. type R, has a light recess close to the flange in order to create a more uniform surface pressure to the shaft.



ETP-MINI™ inkl. typ R

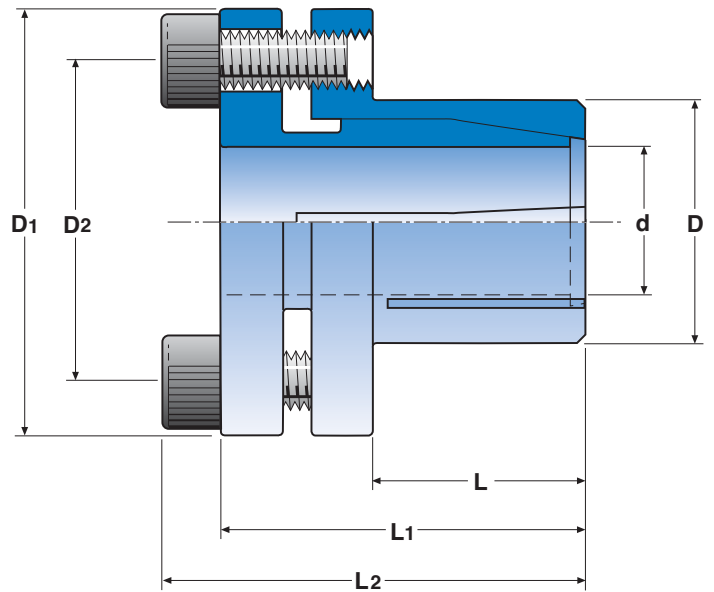

Notation ETP-MINI XX

ETP-MINI	Dimensions							Transmittable torque or axial force		Screws DIN 912, 12.9			Polar moment of inertia J $\text{kgm}^2 \cdot 10^{-6}$	Weight kg
	d mm	D mm	D ₁ mm	D ₂ mm	L mm	L ₁ mm	L ₂ mm	Tr Nm	Fr kN	Ant.	Dim.	Tt Nm		
6	6	14	25	18	10	19	22	7	2,5	2	M3	2	2,1	0,03
1/4"	6,35	14	25	18	10	19	22	8	2,5	2	M3	2	2,1	0,03
8	8	15	27	20	12	21,5	25,5	20	5	2	M4	4	3,3	0,04
9	9	16	28	21	14	24	28	28	6,5	2	M4	4	4,4	0,05
3/8"	9,525	16	28	21	14	24	28	30	6,5	2	M4	4	4,4	0,05
10	10	16	28	21	14	24	28	34	6,5	2	M4	4	4,3	0,05
11	11	18	30	23	14	25,5	29,5	36	6,5	2	M4	4	6,2	0,06
12	12	18	30	23	14	25,5	29,5	40	6,5	2	M4	4	6,1	0,06
1/2"	12,7	18	30	23	14	25,5	29,5	42	6,5	2	M4	4	6,0	0,06
14	14	22	35	27	15	27,5	31,5	66	9,5	3	M4	4	13,2	0,08

Tr= Transmittable torque when axial force is 0. } When the screws are tightened to Tt.
 Fr= Transmittable axial force when torque is 0. }
 Tt= Recommended tightening torque for the screws.

The dimensions are valid for ETP-MINI before mounting.
 Dimensions subject to alternations without notice.

Notation ETP-MINI R-XX

ETP-MINI	Dimensions							Transmittable torque or axial force		Screws *) DIN 912, A4			Polar moment of inertia J $\text{kgm}^2 \cdot 10^{-6}$	Weight kg
	d mm	D mm	D ₁ mm	D ₂ mm	L mm	L ₁ mm	L ₂ mm	Tr Nm	Fr kN	Ant.	Dim.	Tt Nm		
R-6	6	14	25	18	10	19	22	5	1,7	3	M3	1,2	2,1	0,03
R-8	8	15	27	20	12	21,5	25,5	17	4,4	3	M4	2,7	3,3	0,04
R-9	9	16	28	21	14	24	28	20	4,4	3	M4	2,7	4,4	0,05
R-10	10	16	28	21	14	24	28	23	4,4	3	M4	2,7	4,3	0,05
R-11	11	18	30	23	14	25,5	29,5	25	4,4	3	M4	2,7	6,2	0,06
R-12	12	18	30	23	14	25,5	29,5	27	4,4	3	M4	2,7	6,1	0,06
R-14	14	22	35	27	15	27,5	31,5	48	6,5	4	M4	2,7	13,2	0,08

Tr= Transmittable torque when axial force is 0. } When the screws are tightened to Tt.
 Fr= Transmittable axial force when torque is 0. }
 Tt= Recommended tightening torque for the screws.

The dimensions are valid for ETP-MINI R before mounting.
 Dimensions subject to alternations without notice.

TOLERANCES

Shaft: k6-h10.

Hub: H8.

For further information see under the section for technical information and tolerances.

MATERIAL FOR TYPE R

Euronorm 1.4305, stainless steel, X10CrNiS18-9.


*)Screws: surface coated for a low and even friction in the threads.

MOUNTING ADVICE

Make sure the screw threads for type R are well lubricated (OKS 260 or Molykote D) before each mounting.

Runout, balance, number of mountings and hub/hollow shaft.

See the section for technical information.

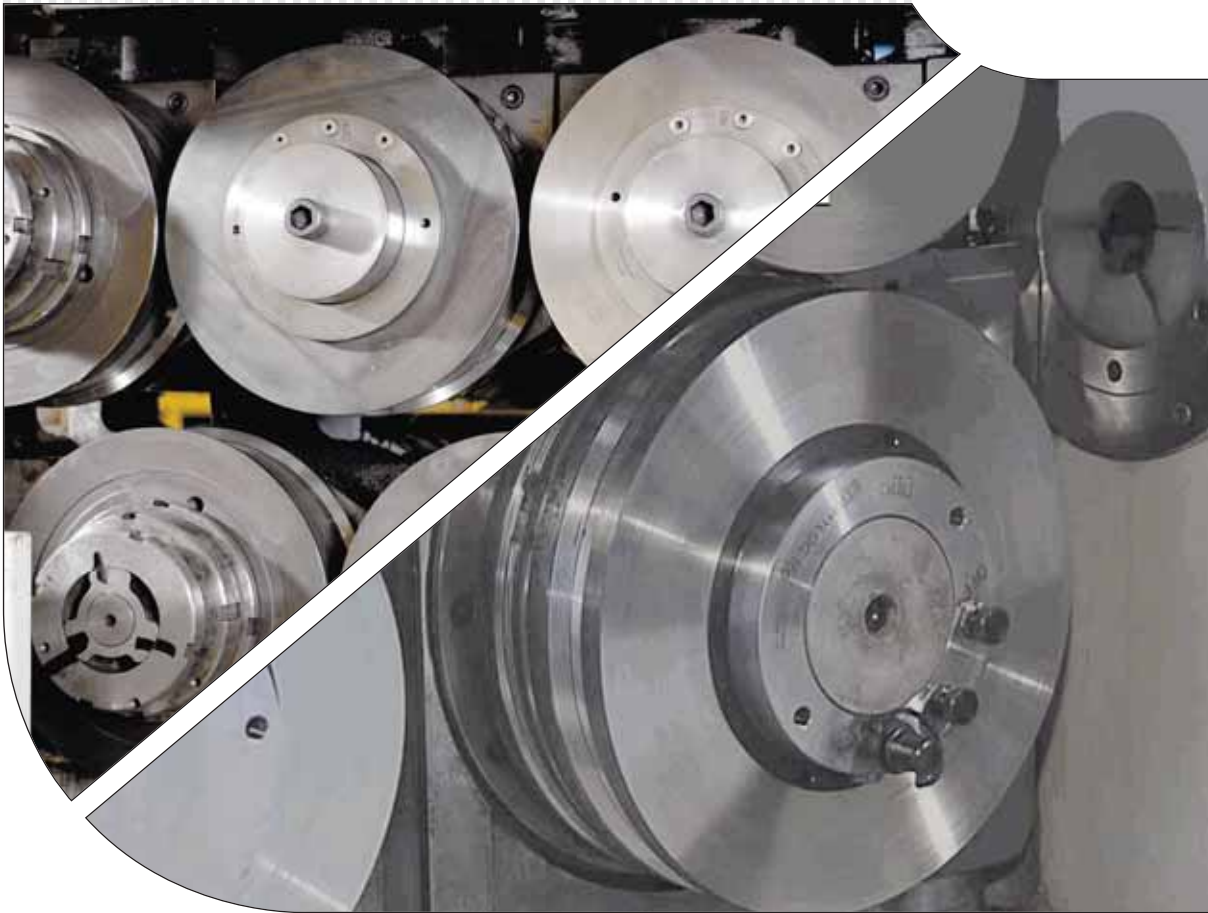

ETP-HYLOC, due to its robust design, is ideally suited to work in difficult environments and heavy operations like steel rolling mills, process industry etc. An interesting application, among many, has been fastening of rolls to shafts. ETP-HYLOC is fast to mount, has good concentricity and can take high radial loads.

CONSTRUCTION

ETP-HYLOC is a hydromechanical joint, which consists of a double-walled steel sleeve which encloses a conical moveable piston. In the flange there are three threaded connections ("ON", "P" and "OFF") in the radial direction and the same in the axial. This makes it possible to choose radial or axial connection of the hoses. Mounting and dismantling is carried out with a hydraulic pump.

OPERATION


When the piston is moved, by the hydraulic pressure from the pump, the double-walled sleeve expands uniformly against shaft and hub to form a rigid joint.

When dismantling, the piston is moved in the opposite direction and the joint will loosen.


A small amount of oil will be taken via spiral tracks in the piston between the surfaces (pressure applied through the "P" connection), in this way making it easier for the piston to move.

QUALITIES

- High transmittable torque which can be varied by changing the mounting pressure.
- Fast mounting/dismantling in tight spaces. By using a pump the time is reduced to a minimum even for large sizes.
- Radial and axial connection is possible.
- Fine adjustments of the hub can be made when mounting.
- Good concentricity, also after several mountings.
- High radial load capacity.

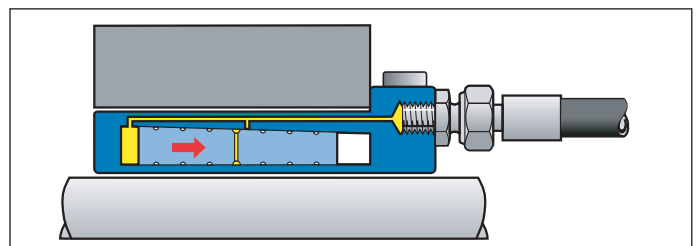


Mounting: Apply pressure in the "ON" and "P" (not shown) connections. When mounted no hydraulic pressure remains. The small conical angle prevents the piston from releasing.

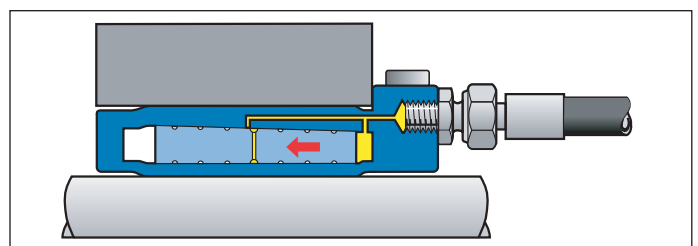

Dismantling: Apply pressure in the "OFF" and "P" (not shown) connections. ETP-HYLOC returns to its original measurements and the joint is loose.



ETP-HYLOC®

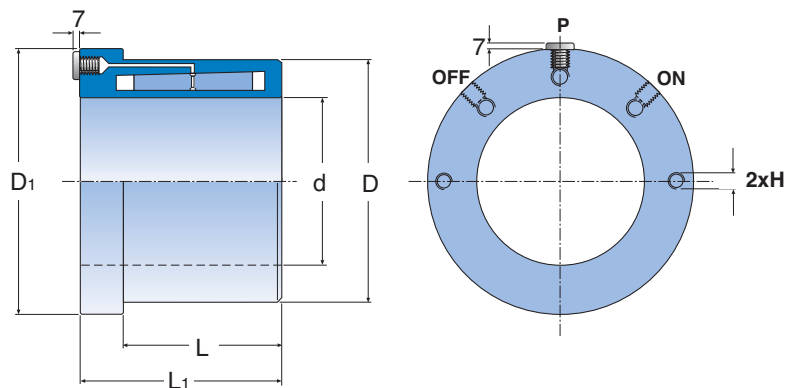

ETP-HYLOC is prepared for axial connection of the hoses (where the plastic plugs are situated). If radial connection is to be made, the steel plugs are moved to the axial connections and are tightened with a torque wrench to 20 Nm. Axial/radial connections G 1/8.

Notation: ETP-HYLOC XXX

ETP-HYLOC	Dimensions					Transmittable torque or axial force at 1000 bar						H	Polar moment of inertia J kgm ² · 10 ⁻³	Weight kg
						Shaft h7		Shaft h8		Min. hub D _H mm				
	d mm	D mm	D ₁ mm	L mm	L ₁ mm	Tr kNm	Fr kN	Tr kNm	Fr kN	Yieldpoint N/mm ² >300	Yieldpoint N/mm ² >400			
50	50	77	101	57	82	2,6	70	2,4	70	110	105	M8	3,2	2,4
60	60	89	113	65	90	4,6	130	4,3	130	140	125	M8	5,4	3,1
70	70	102	122	75	100	7,9	210	7,4	200	170	145	M8	8,7	4,1
80	80	115	135	85	110	12,1	290	11,5	280	200	160	M8	14	5,4
90	90	128	148	95	120	17,1	380	16,2	360	235	180	M12	23	7,0
100	100	140	160	105	130	24,2	485	23,1	460	270	200	M12	34	8,6
110	110	154	173	115	140	32,9	595	31,5	570	295	220	M12	51	11
120	120	168	186	125	150	43,2	720	41,6	690	320	240	M12	76	14
130	130	182	200	135	160	53,8	825	51,4	790	350	260	M16	110	17
140	140	196	213	145	170	68,9	985	66,2	945	375	280	M16	150	21
150	150	210	227	155	180	85,4	1135	82,3	1095	400	300	M16	210	25
160	160	224	240	165	190	104	1305	100	1260	425	320	M16	290	30
180	180	252	267	185	210	150	1675	146	1625	480	360	M16	500	42
200	200	280	293	205	230	206	2060	200	2000	535	400	M16	830	56
220	220	308	320	225	250	273	2485	266	2415	585	435	M16	1300	73

Tr= Transmittable torque when axial force is 0.
Fr= Transmittable axial force when torque is 0.
D_H=Outer diameter for hub material in steel.

H: Threads for easy handling.
Dimension subject to alterations without notice.

ETP-HYLOC	600 bar						800 bar						1200 bar					
	Shaft		Min. hub D _H			Shaft		Min. hub D _H			Shaft		Min. hub D _H					
	h7	h8	Yieldpoint N/mm ²			h7	h8	Yieldpoint N/mm ²			h7	h8	Yieldpoint N/mm ²					
Tr kNm	Tr kNm	>200	>300	>400	Tr kNm	Tr kNm	>300	>400	Tr kNm	Tr kNm	>300	>400	Tr kNm	Tr kNm	>300	>400		
50	0,8	0,8	90	90	90	1,6	1,4	95	90	3,3	3,1	130						
60	1,1	1,1	115	105	95	3,3	3	120	110	5,9	5,6	155						
70	2,4	2,4	135	120	110	5,8	5,3	140	125	9,9	9,5	170						
80	5,6	5,3	155	140	130	9	8,4	165	140	15,3	14,6	190						
90	8,3	7,4	180	160	145	12,7	11,8	185	160	21,6	20,6	215						
100	12,1	11	200	170	160	18,2	17,1	210	180	30,3	29,2	235						
110	16,8	15,4	220	195	180	24,8	23,5	235	195	41	39,6	260						
120	22,3	20,6	240	215	195	32,7	31,1	255	215	53,7	52	280						
130	27,2	24,9	260	230	210	40,5	38,1	275	230	67	64,7	305						
140	35,6	32,9	285	250	225	52,3	49,6	295	250	85,6	82,9	325						
150	44,5	41,4	300	265	240	65	61,9	315	265	105	102	350						
160	54,8	51,2	320	285	260	79,5	76	335	285	129	125	370						
180	80	75	360	320	290	115	110	375	320	186	181	415						
200	109	103	400	355	320	157	151	420	355	254	248	465						
220	144	137	440	390	355	209	201	460	390	338	330	510						

Transmittable torque at different mounting pressures.
The torque for sizes ≥ 80 can be increased by using ETP-HFC, see page 26.

Runout, balance, number of mountings and radial loads/bending torque.
See the section for technical information.

TOLERANCES

Shaft h7 or h8.
Hub H7.
For further information see under the section for technical information and tolerances.

MOUNTING – ADVICE

The contact surfaces L and L₁ must be completely covered by the shaft and hub.
The oil for the pump should be a transmission oil type 80 W.


For pumps/connections see page 25.
For other hub materials, for example aluminium, contact us.

MOUNTING PRESSURE

The mounting pressure is normally 1000 bar.
Max mounting pressure 1200 bar.
Dismantling requires max. 200 bar higher pressure than for mounting.

VERSIONS

Larger sizes available, see page 34.
ETP-HYLOC can be designed to suit special applications on request.

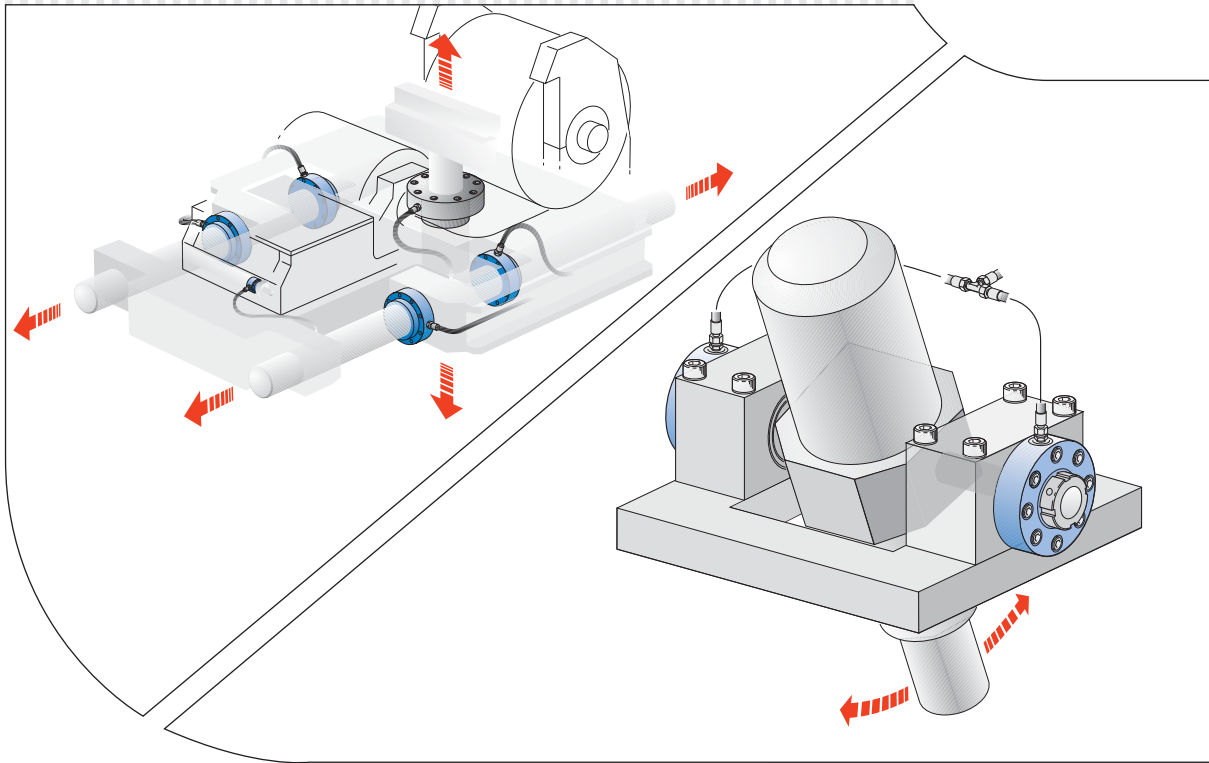

ETP-OCTOPUS is suitable when repositioning of machine parts are going to be done frequently, fast and with high precision, for example in machine tools for qualified machining or forming of steel. With hydraulic pressure one or several ETP-OCTOPUS are loosened and clamped simultaneously.

CONSTRUCTION

ETP-OCTOPUS is a double-walled hardened steel sleeve with a flange. In the flange there are bores for mounting of a hub and a scraper with a screw joint, threaded connection for hydraulic oil and an air relief screw. The inner diameter has spiral tracks in order to get an even friction and a defined locking force.


OPERATION

The assembly is done with the screw joint. When hydraulically pressurized the inner sleeve expands uniformly against the shaft and creates a rigid joint. When the pressure is released the sleeve returns to its original size and can then easily be moved along the shaft to its new position and be repressurized.


QUALITIES

The unique hydraulic principle, the solid and simple design of the sleeve gives a great number of advantages:

- High torsional stiffness.
- Both axial force and torque can be transmitted.
- Easy to build in, only space for the screw joint is needed.
- Can be used independent of the operating temperature.
- No axial movement during pressurizing.
- Low risk of leakage.

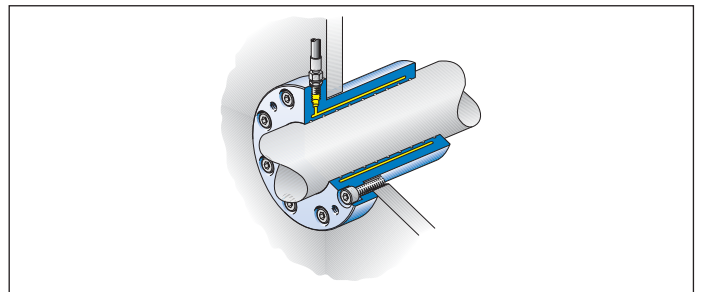


No hub is required for a design with ETP-OCTOPUS as the sleeve is thick enough to withstand the hydraulic pressure.

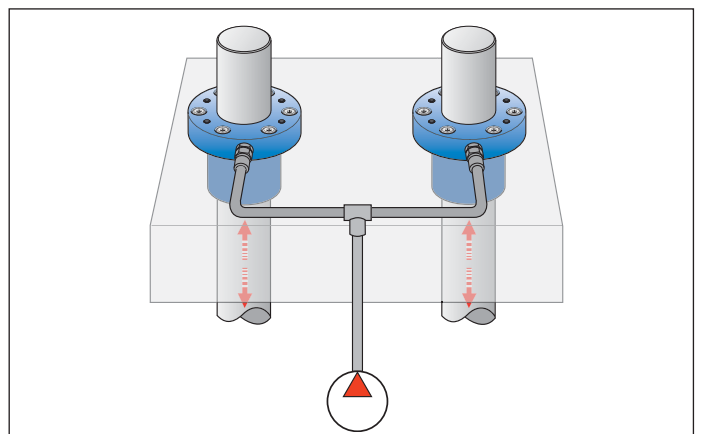

Pressure setting is done with an external pressure source. Several connections can be clamped/loosened simultaneously.



ETP-OCTOPUS™

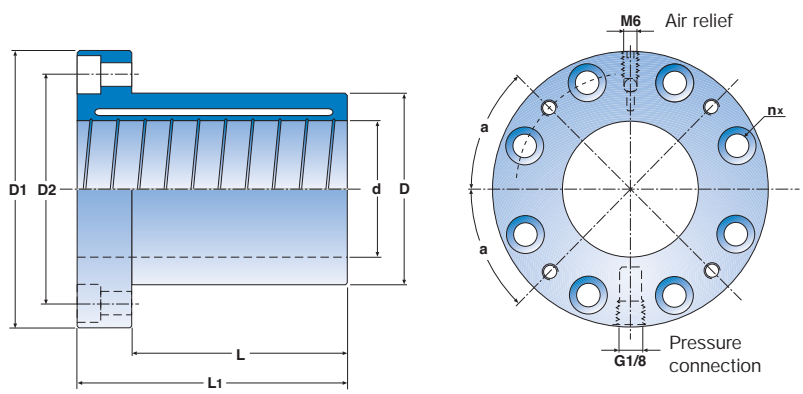

Notation: ETP-OCTOPUS XX

ETP-OCTOPUS	Dimensions					Transmittable torque or axial force				Screw joint for screw: DIN 912, 12.9				Bore M6 (4 pcs.) for scraper a°	Weight kg
	d mm	D mm	D1 mm	L mm	L1 mm	M1 Nm	M2 Nm	F1 kN	F2 kN	n	D2 mm	Dim.	Tt Nm		
C-30	30	42	66	55	75	140	230	9	15	6	52	M6	17	30	0,7
C-35	35	48	72	55	75	180	300	10	17	6	58	M6	17	30	0,8
C-40	40	55	79	55	75	270	420*	13	21	6	65	M6	17	30	1,0
C-45	45	62	86	55	75	370	460*	16	25	6	72	M6	17	30	1,2
C-50	50	70	101	80	100	710	1000	28	42	8	84	M8	40	45	2,0
C-60	60	83	114	100	120	1200	1500*	42	62	8	97	M8	40	45	3,0
C-70	70	97	128	120	140	1700*	1700*	64	92	8	111	M8	40	45	4,6
C-80	80	110	148	130	150	3300	4000*	84	110	10	128	M10	79	54	6,2
C-90	90	125	163	130	150	4100	4400*	91	130	10	143	M10	79	54	8,0
C-100	100	138	176	130	150	4800*	4800*	105	140	10	156	M10	79	54	9,5

T1 resp. T2 = transmittable torque when axial force is 0. } At pressure p1 (350 bar) resp. p2 (450 bar), $\mu = 0,1$.
 F1 resp. F2 = transmittable axial force when torque is 0.
 *) For these torque values the screw joint sets the upper limit for the torque.
 Tt = recommended tightening torque for the screws.

Dimensions subject to alterations without notice.

TOLERANCES

Shaft: f7.
 Hub: H7 for clearance fit.
 N7 for light press fit.
 It can be used without a hub.

OPERATING TEMPERATURE

Depends on the surrounding components within the system (connections/hoses).

PRESSURE MEDIUM

All types of hydraulic oils can be used.

HYDRAULIC PRESSURE

T and F changes linearly between the given pressures for a certain shaft size.
 We do not recommend pressure above 450 bar.

SCRAPER

To prevent abnormal wear of the contact surfaces the use of a scraper to clean the shaft is recommended. It can be mounted in a ring which is fastened with screws to the flange.

LUBRICATION

The surfaces between ETP-OCTOPUS and the shaft should when moving, create a minimum of friction in order to avoid wear but at the same time when clamping give enough holding force .
 All values have been calculated with a friction coefficient of $\mu = 0,1$. This will also be maintained if, as we recommend, the surfaces are reasonably lubricated with mineral oil.
 The spiral tracks inside the sleeve ensures that any unnecessary amount of lubricant is transferred away. Grease or Molybdendisulfide based lubricants should not be used.

NUMBER OF PRESSURE SETTINGS

The number of cycles mainly depends on the pressure. The following guide values can be used:
 p = 300 bar: 500 000 cycles.
 p = 350 bar: 300 000 cycles.
 p = 450 bar: 100 000 cycles.
 Higher cycles may cause the sleeve to fatigue.

SPECIAL DESIGNS

For models which clamp only to the outside or in both directions there are possible solutions. For such cases please send us information and we will then send a suggestion/quotation.

ETP-EXPRESS incl. type R and C ETP-TECHNO



The torque wrenches are specially designed to facilitate the use of the ETP connections and assure a correct tightening.

For size ETP-EXPRESS	Torque wrench	Torque (Nm)
15 – 35	M05	5
38 – 60	M21	21
70 – 100	M39	39

Torque wrenches for ETP-EXPRESS incl. type R and C.

SCREWS

All pressure screws for ETP-TECHNO and ETP-EXPRESS incl. type R and C have cap heads. These are available as spare parts.


TORQUE WRENCHES

The torque wrenches are designed for ETP-TECHNO and ETP-EXPRESS incl. type R and C. They are equipped with wratch head and snap function when the fixed torque (recommended tightening torque, T_t) is reached. The hex head key is integrated in a specially designed adapter which facilitates handling and accessibility.

For size ETP-TECHNO	Torque wrench	Torque (Nm)
15 – 20	M10	10
25 – 35	M16	16
40 – 50	M24	24
60 – 80	M40	40
90	M60	60
100	M80	80

Torque wrenches for ETP-TECHNO.

ETP-CLASSIC incl. type R ETP-MINI inkl. type R



ETP-CLASSIC hex head screws, DIN 933 12.9.
ETP-MINI R hex head screws, DIN 933 A4 (surface coated).



To facilitate the use of the ETP hub-shaft connections there are specially designed torque wrenches, hex head screws and adapters for these.

HEX HEAD SCREWS

For ETP-CLASSIC and ETP-MINI R there are hex head screws as accessories. These can be used when space in the axial direction is limited.

TORQUE WRENCHES

The torque wrenches have been designed for ETP-CLASSIC and ETP-MINI incl. the R types. They have a fixed torque which releases with a "snap" at the recommended tightening torque, T_t . The torque wrench makes the mounting easier and guarantees a correct tightening. It is equipped with an adapter which fits the corresponding screws for the ETP connection. For ETP-CLASSIC and ETP-MINI R there is an adapter for hex head screws as an accessory, in case the screws have been changed.

For size ETP-CLASSIC	Torque wrench	Torque (Nm)	Adapter for hex head
15	M06	6	A08
19 – 42	M08	8	A08
45 – 65	M13	13	A10
70 – 100	M32	32	A13
R-15 – R-40	MR4,5	4,5	Standard
R-45 – R-50	MR7,8	7,8	Standard

Torque wrenches for ETP-CLASSIC incl. type R.

For size ETP-MINI	Torque wrench	Torque (Nm)	Adapter for hex head
6 – 1/4"	M02	2	–
8 – 14	M04	4	–
R-6	MR1,2	1,2	M-R6*
R-8 – R-14	MR2,7	2,7	A07

Torque wrenches for ETP-MINI incl. type R. *Complete wrench.

ETP-HYLOC



C-02

N-02

Quick connection
type 02.



C-03

N-03

Quick connection
type 03.



Handpump H-11 is
delivered in a practical
steel box.

Motorpump A-03,
pneumatically driven.



QUICK CONNECTIONS

When ETP-HYLOC needs to be mounted frequently and fast, the hoses can be equipped, as accessories, with special high-pressure quick release chucks. The ON, P, and OFF connections for ETP-HYLOC are then equipped with the corresponding nipples.

There are the following 2 versions:

Type 02: the chuck, C-02, is screwed onto the nipple, N-02, with an outer ring.

Type 03: the chuck, C-03 is pressed on to the nipple, N-03. This type has bigger built-in dimensions and can not be used axially, if the shaft pass all the way through, for sizes ≤ 110 mm.

3 nipples are needed for each ETP-HYLOC and for each pump 3 chucks. A quick connection consists of one chuck (C) and one nipple (N), for example type 02 of C-02 and N-02.

HYDRAULIC PUMPS

The pumps are designed for ease of use at the pressures and volumes that are needed for ETP-HYLOC.

The handpump H-11 is a robust, CE marked, pump.


Motorpump A-03 is designed to be used when mounting frequently.

Both pumps are equipped with manometer and 3 hoses (length 3 m), 2 high-pressure hoses and a thinner hose for the return oil. A threaded connection G 1/8 is on each hose which is suitable for ETP-HYLOC.

Max. pressure 1 500 bar, controlled by a pressure release valve. The pressure release valve is available as accessory for 700 and 1000 bar for the handpump H-11.

Friction increasing methods


In certain applications high even loads or high peak loads occur, which would cause the ETP hub-shaft connection to slip. To overcome this problem some ETP accessories have been developed which increases the coefficient of friction, μ , and therefore the transmittable torque and axial force. The enlarged drawings below illustrate the various products. The bore surface of the ETP hub-shaft connection is shown in blue, the shaft in grey.

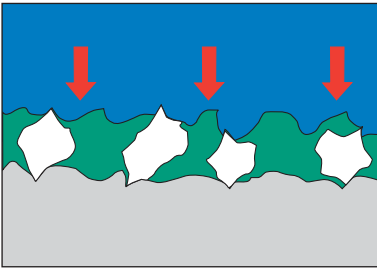

ETP-FRICTION

ETP-FRICTION is a liquid containing extremely small, hard, irregular particles which "grips into" the contact surfaces. It is easily applied with a brush or cloth. ETP-FRICTION will not harden or cure.

Content in the can: 125 ml.


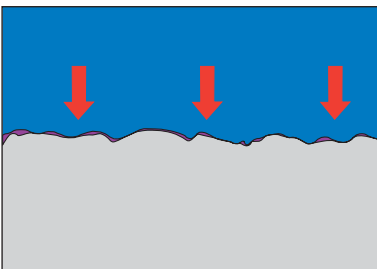


ETP-INTERFIX®

ETP-INTERFIX is a specially developed anaerobic adhesive which fills the irregularities in the surfaces. When hardened ETP-INTERFIX forms a layer of approx. 0,002 mm.

Content in the bottle: 10 gram.

Some premachining of the inner- and outer diameter of the ETP hub-shaft connection is necessary to make sure that dismantling is possible. Instruction is included.

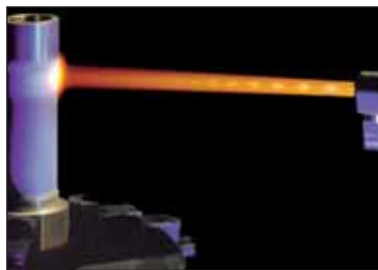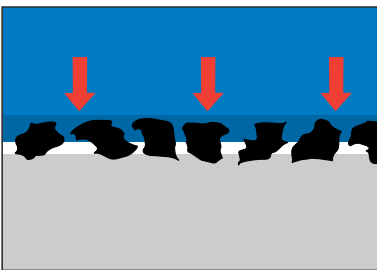

ETP-HFC

ETP-HFC (High Friction Coating) is a surface treatment of the bore and outside diameter of the ETP hub-shaft connection. ETP-HFC is a carbide coating of small, sharp particles which are imbedded into the treated surface. Is offered separately.

TRANSMITTABLE TORQUE CAPACITY

Untreated ETP hub-shaft connection = 1 M.

Torque duty	ETP-FRICTION	ETP-INTERFIX	ETP-HFC
Static	2 M	2-3 M	2 M
*Pulsating	Not suitable	2-3 M	2 M
*Alternating	Not suitable	2-3 M	2 M

**For applications with a large number of load cycles (more than 10 000 times) at an increased torque level, there is a risk of fatigue in the ETP product. Please contact us to confirm your application.*

The friction increasing methods allows for easy dismantling of the ETP hub-shaft connections. ETP-FRICTION and ETP-INTERFIX must be reapplied after remounting.

The methods only work for locking assemblies with unslotted sleeves. They have only been tested on ETP hub-shaft connections.

Information on www.etp.se




On the homepage there is updated information about the products, new products, mounting instructions and links to most of the ETP representatives.

CAD SYMBOLS

To facilitate the design work there are CAD symbols in the form of side and front views and 3D-views for most of the ETP connections ready to be downloaded.

Transmittable torque

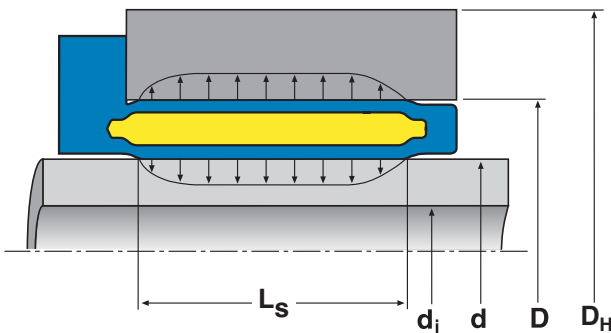

Built-in principle of ETP-connection.

The ETP connections are tubular and create a surface pressure on the shaft and the hub. By the friction resistance both axial forces and torques can be transmitted. The amount will be determined by the area of the contact surface, the surface pressure and the coefficient of friction (μ).

The following formula is valid:


$$T_r = p_s \cdot \frac{\pi d^2}{2} \cdot L_s \cdot \mu$$

L_s = the contact length.

p_s = surface pressure on the shaft.

p_H = surface pressure on the hub.

Axial force

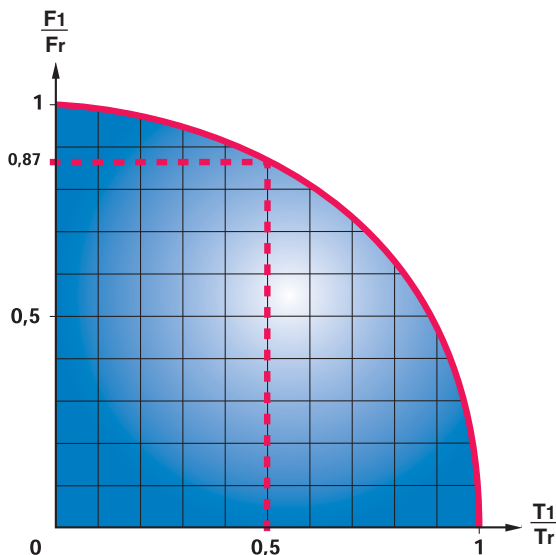

If axial force (F_1) and torque (T_1) are to be transmitted at the same time, the following formula is valid.

$$\left(\frac{F_1}{F_r}\right)^2 + \left(\frac{T_1}{T_r}\right)^2 \leq 1$$

this means that the value should be inside the quarter circle in the diagram.

F_r and T_r are the rated values for axial force and torque for the different ETP products.

Coefficient of friction (μ)

Recommended surface finish, shaft/hub
Ra max 3,0 (μm)
Ra min 1,0 (μm)

The coefficient of friction depend on a number of factors. The most important are:

SURFACE FINISH

The surface must not be too smooth. If it is, the influence of impurities can be great. A good turning operation is often better than grinding.

CLEANLINESS

It is very important that the surfaces are well cleaned. Grease on the surfaces will drastically reduce the coefficient of friction.

A thin oil will however only reduce the coefficient of friction with about 0,03 μ .

MATERIAL

The coefficient of friction varies depending on the materials of the contact surfaces, see table.

Value of μ for well cleaned contact surfaces					
steel					stainless steel
steel	cast iron	aluminium	aluminium bronze	stainless steel	stainless steel
0,15	0,13	0,17	0,20	0,15	0,15

Surface pressure and torque

Max. tightening torque (screw quality 12.9)			
*M4	**M5	**M6	**M8
5 Nm	10 Nm	17 Nm	40 Nm

If the tightening torque is increased the transmittable torque will increase.

*) Valid for ETP-MINI. Transmittable torque, T_r , is increased by 20 %.

**) Valid for ETP-CLASSIC. Transmittable torque, T_r , is increased by 25 %.

This effect can only be used if the operating temperature < the mounting temperature.

If the surface pressure is too low, a metallic contact between the surfaces will not be created because of oxide layers. If the surface pressure is too high, plastic deformation can occur and the friction will decrease dramatically. The hydraulic ETP principle gives a surface pressure within the right range, which is also utmost even around and along the contact area.

The surface pressure from the ETP connections (not ETP-HYLOC or ETP-OCTOPUS) is at the recommended tightening torque:

p_S = approx. 90 N/mm².

p_H = approx. 70 N/mm².

By increasing the surface pressure the transmittable torque can be increased, see table.

Tolerances

Change of torque when ETP-CLASSIC is mounted on:		
h9 shaft	h8 shaft	k6 shaft
- 25 %	acc. to techn. data	+ 20 %

Recommended tolerances for shaft and hub are given under the section for each product.

If the tolerance differs from these so the play between the contact surfaces is increased. The surface pressure and the torque will decrease. The opposite is valid for decreased play. See example in the table.

Shaft tolerances in μm (upper/lower limits)					
Shaft dia.	k6	h7	h8	h9	h10
(3) – 6	+9/+1	0/-12	0/-18	0/-30	0/-48
(6) – 10	+10/+1	0/-15	0/-22	0/-36	0/-58
(10) – 18	+12/+1	0/-18	0/-27	0/-43	0/-70
(18) – 30	+15/+2	0/-21	0/-33	0/-52	0/-84
(30) – 50	+18/+2	0/-25	0/-39	0/-62	0/-100
(50) – 80	+21/+2	0/-30	0/-46	0/-74	0/-120
(80) – 120	+25/+3	0/-35	0/-54	0/-87	0/-140
(120) – 180	+28/+3	0/-40	0/-63	0/-100	0/-160
(180) – 250	+33/+4	0/-46	0/-72	0/-115	0/-185

Hub tolerances in μm (upper/lower limits)		
Shaft dia.	H7	H8
(10) – 18	+18/0	+27/0
(18) – 30	+21/0	+33/0
(30) – 50	+25/0	+39/0
(50) – 80	+30/0	+46/0
(80) – 120	+35/0	+54/0
(120) – 180	+40/0	+63/0
(180) – 250	+46/0	+72/0
(250) – 315	+52/0	+81/0

Dimensioning of hub and hollow shaft

For ETP-HYLOC and ETP-OCTOPUS see information under the corresponding product section, the information below is not valid for these.

Because of the even and reasonable surface pressure and the compact built-in dimensions of the ETP connections, a thin material in hub and shaft can be used. Also aluminium can be used.

For hubs and hollow shafts in steel, the yield point of those decides the thickness of the material. For cast iron and aluminium the module of elasticity is decisive.

The requisite thickness can be selected from the table or more accurately in the diagram.

R_{eL} = Yield point for the material.

E = Module of elasticity.

D_H = The minimum outer diameter of the hub.

d_i = The maximum inner diameter of the hollow shaft.

σ = Effective stress.

For other notations see figure on page 27.

If $D_H/D < 1,4$ for the hub or if $d_i/d > 0,6$ for the hollow shaft, contact us for advice.


For all materials there will be an elastic expansion/compression of the hub/hollow shaft.

The expansion/compression will not be uniform of the hub/hollow shaft if the material is unsymmetrical.

For accurate calculation contact us.


HUB

Material	D_H/D
Steel incl. stainless, $R_{eL} > 300 \text{ N/mm}^2$	1,4
Steel incl. stainless, $R_{eL} > 220 \text{ N/mm}^2$	1,5
Cast iron, $E = 120 \text{ kN/mm}^2$	2,0
Aluminium, $E = 70 \text{ kN/mm}^2$	2,5

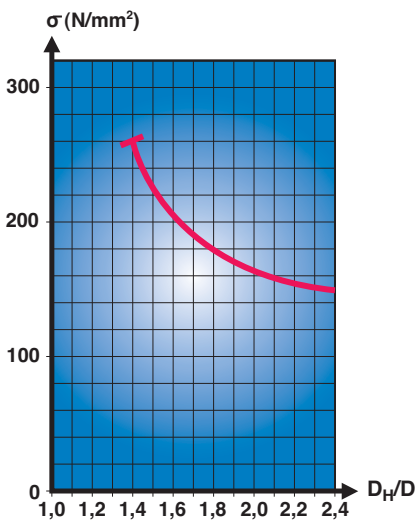

HOLLOW SHAFT

Material	d_i/d
Steel incl. stainless, $R_{eL} > 300 \text{ N/mm}^2$	0,6
Steel incl. stainless, $R_{eL} > 240 \text{ N/mm}^2$	0,5
Cast iron, $E = 120 \text{ kN/mm}^2$	0,3
Aluminium, $E = 70 \text{ kN/mm}^2$	0,2

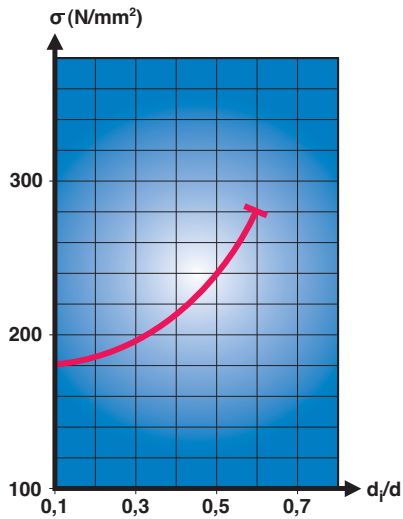

Runout and balance

The hydraulic ETP principle assures a good runout and balance. All products are balanced by design. For guide values see the table.

To these values the runout/unbalance for shaft and hub in the actual case has to be added in order to get the final value when mounted.

Dynamic balancing can be done on request.

ETP-EXPRESS and ETP-TECHNO can be dynamically balanced to G 2,5 on request.

	ETP-EXPRESS incl. type R and C	ETP-TECHNO	ETP-CLASSIC incl. type R	ETP-MINI incl. type R	ETP-HYLOC
Runout (mm)*	< 0,02	0,006	0,03 – 0,06	0,02	0,01 – 0,02
Unbalance (gmm/kg)	75	50	100	100	75**

* Values are also valid after repeated mountings.

** For size $\leq 100 \text{ mm}$, with radial mounted steel plugs, the unbalance is larger.

Number of mountings

ETP connection	Nbr. of mountings
ETP-EXPRESS 15-35	2000
ETP-EXPRESS 38-60	1000
ETP-EXPRESS 70-100	500
ETP-EXPRESS R and C 15-35	800
ETP-EXPRESS R and C 38-60	400
ETP-EXPRESS R 70-80	200
ETP-TECHNO 15-50	5000
ETP-TECHNO 60-80	3000
ETP-TECHNO 90-100	500
ETP-CLASSIC	100
ETP-CLASSIC R	50
ETP-MINI	100
ETP-MINI R	50
ETP-HYLOC	2000

One of the qualities with the ETP connections are their ability to be mounted quickly and repeatedly with maintained performance and precision.

There is however a limit when the screw/screws will be worn and has to be changed. If the threads are cleaned and regularly lubricated, the guide values in the table can be used.

The values indicates when the screws needs to be changed, the ETP connection lasts longer.

For the R and C types it is very important that the screws are well lubricated when tightening, both for proper function and full lifetime capabilities. When used in food processing applications or similar we recommend the lubricants OKS 260 or Molykote D. For other applications Molykote G-n plus can be used.

ETP-HYLOC is not recommended for more mountings than acc. to the table.

Fatigue


ETP connection	Alternating	Pulsating
ETP-EXPRESS incl. typ R and C	0,5	0,6
ETP-TECHNO	0,7	0,8
ETP-CLASSIC incl. type R: 15 – 30 mm	0,6	0,7
ETP-CLASSIC incl. type R: 32 – 100 mm	0,5	0,6

When the loads are in form of alternating or pulsating torque it is recommended to reduce the transmittable torque, T_r , with the factors according to the table (factor $\cdot T_r$). The values are based on tests and calculations on the lifetime of ETP connections.

The lifetime for the ETP connection increases if the play between the contact surfaces is decreased, for example ETP-CLASSIC can be used on a shaft tolerance of k6, instead of the recommended h8.

ETP-MINI and ETP-HYLOC can take essentially higher fatigue loads.


Radial loads and bending torque

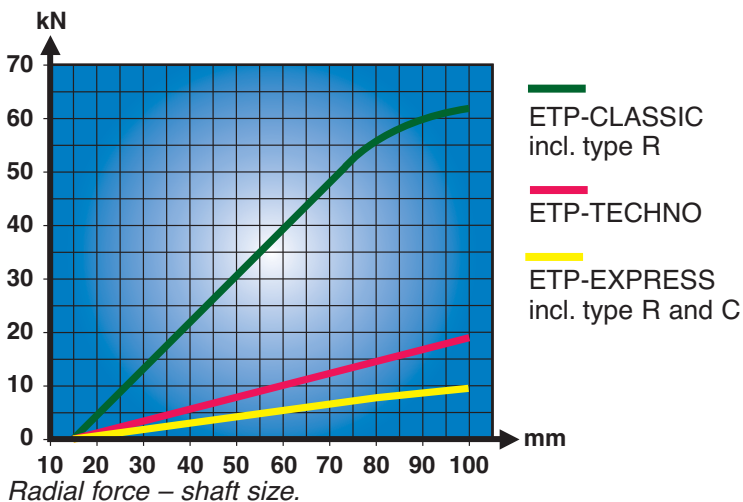

Most friction joints have limited capacity to transmit radial forces and bending torque. High levels of these loads can affect the function of the ETP connection. The values acc. to the diagram and table based on tests can serve as guide lines. ETP-MINI and ETP-HYLOC can transmit essentially higher radial forces than the other connections.

	ETP-EXPRESS incl. type R and C	ETP-TECHNO	ETP-CLASSIC incl. type R	ETP-MINI incl. type R	ETP-HYLOC
Bending torque as % of transmittable torque,	5	10	15	30	15

Temperature

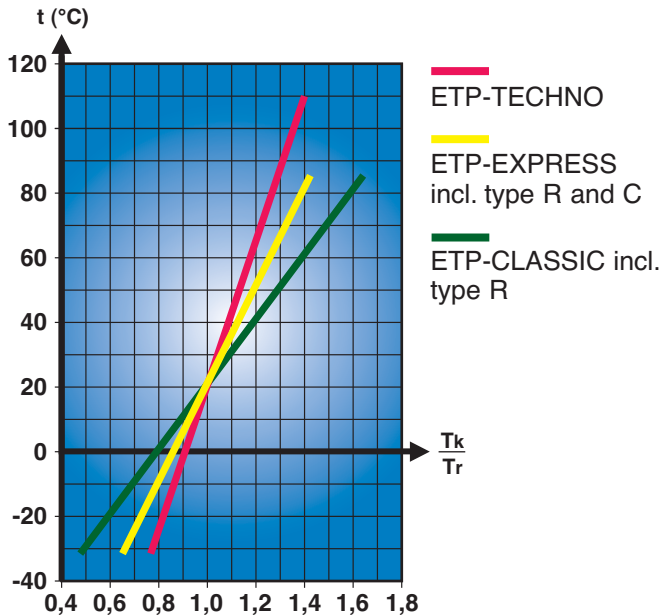

The pressure medium in the hydraulic ETP connections and the double-walled steel sleeve have different volume expansion coefficients. This means that when the temperature rises, the pressure in the connection increases and a higher torque can be transmitted. The opposite is valid at decreasing temperature. Also the seals built into the connections decides the upper and lower operating temperature.

The following has to be taken into consideration when the operating temperature differs from the mounting temperature:


- Max. and min. temperature for continuous operation, see table. ETP-MINI and ETP-HYLOC can withstand essentially wider upper and lower limits.
- The decreases in torque due to lower operating temperatures. See diagram. ETP-MINI and ETP-HYLOC are not affected.

T_r = transmittable torque acc. to technical data.

T_k = transmittable torque at operating temperature.

ETP connection	Min. temp. °C	Max. temp. °C
ETP-EXPRESS incl. type R and C	- 30	+ 85
ETP-TECHNO	- 30	+ 110
ETP-CLASSIC incl. type R	- 30	+ 85

Keyways

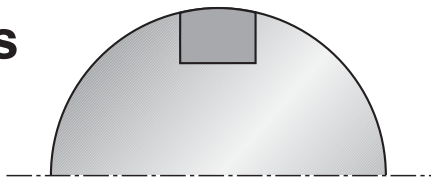

If there is a keyway in the shaft or hub, we recommend it to be filled in with for example some two component hardening medium (not for ETP-MINI). The medium is then hand grind to the diameter of the shaft/hub. This prevents deformation and dismantling problems of the double-walled sleeve.

Rate of corrosion


Solution	$\mu\text{m}/\text{year}$
26% NaCl	0,2
25% KCl	0
31% Na ₂ SO ₄	0,8
27% Al ₂ (SO ₄) ₃	5
10% CH ₃ CO ₂ H	25
5% C ₆ H ₈ O ₇	2
10% (CO ₂ H) ₂	3
2% NH ₃ *	28
28% NH ₃ *	16
27% NH ₄ Cl	8
43% (NH ₄) ₂ SO ₄	3
H ₂ O	0,1
80% H ₃ PO ₄	3
1% FeCl ₃	200

Guide values for the corrosion speed in mm/year of electroless Nickel.


Electroless Nickel gives an extremely good protection against all types of water, strong caustic solutions, strong and weak acids, organic acids and all types of salt solutions. It is used successfully in most industries i.e. food and drug-, automotive-, process-, chemical-, and printing industries.

Solution	$\mu\text{m}/\text{year}$
10% acetic acid	25
Glacial acid	0,8
5% citric acid	2
10% oxalic acid*	3
Formic acid	13
Borax	10
Vinegar	10
Chlorine-wet	10
Sodium Bicarbonate	10
Beer	2
Milk*	2
Fruit and lemon juice	2
Oil vegetable	2
Sodium Hydroxide	2


* Will turn black

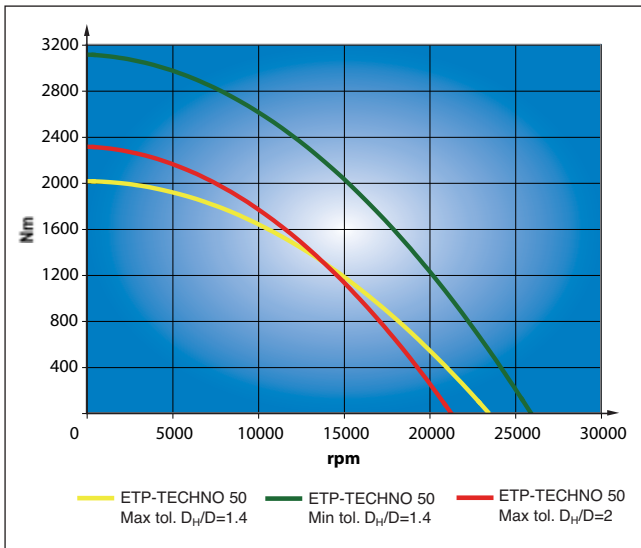


Due to centrifugal force, the transmittable torque will be reduced with increasing speed (rpm). The diagram gives examples for ETP-TECHNO 50 with a steel hub. A reduced tolerance between the contact surfaces gives a higher surface pressure at the same tightening torque, and thus higher transmittable torque at high speeds. A thicker hub is more effected by the centrifugal force and the torque will reduce faster at increasing speed. The example is not directly applicable for other sizes or types of ETP connections. Contact us for assistance with calculations at high speeds.

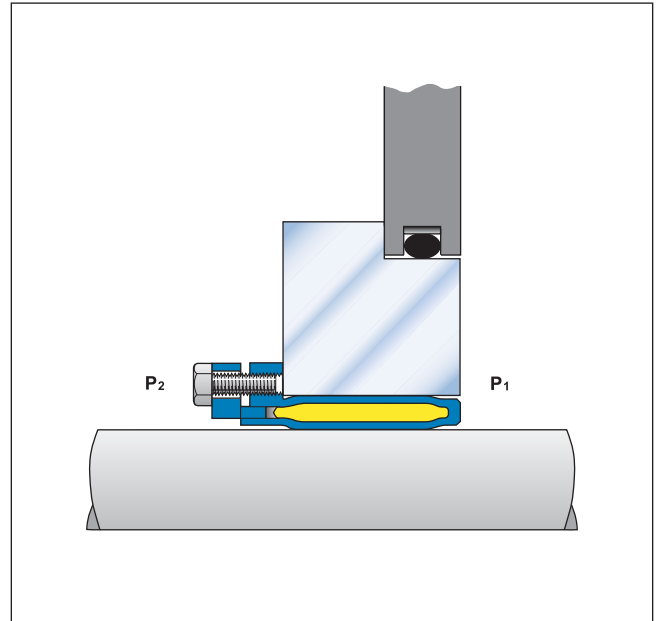

In humid environments, at varying temperature and with a hub made from aluminium ETP-CLASSIC type R can be used. Thanks to the flexibility of ETP-CLASSIC R at varied temperatures, it can be used in hubs of aluminium. Because of the even surface pressure and the lack of slotted sleeves, ETP-CLASSIC R can function as a sealing element up to a pressure difference, $p_1 - p_2$, of 50 bar.

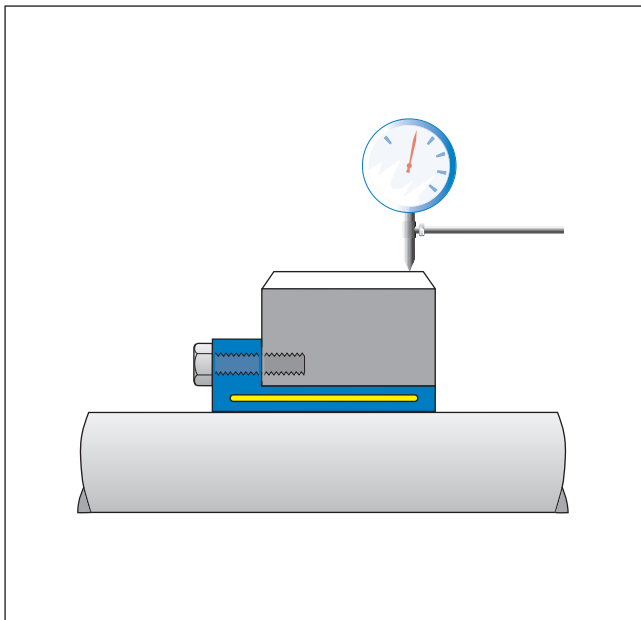


When manufacturing precision gears, they can be fastened with ETP- EXPRESS. If the gear is fixed in its position with an axial screw or pin before the last grinding operation, a repeatability within $2 \mu\text{m}$ will be achieved.

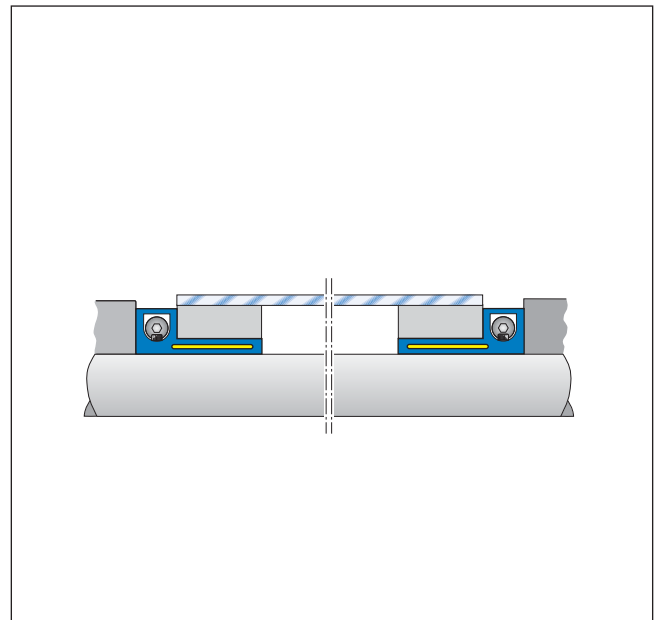


ETP-TECHNO gives advantages when used to fasten printing cylinders in light materials for example aluminium. The cylinder can be changed 1000's of times, using the same ETP-TECHNO, with maintained good concentricity and repeatability. The radial access to the screw facilitates the handling and saves space.

Technical information


Design tips

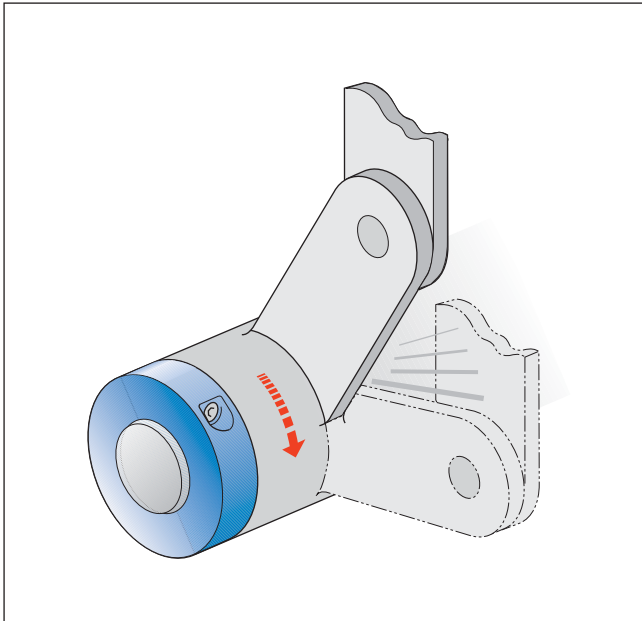


There is a linear ratio, between the transmittable torque and the tightening torque for the screw, for ETP-EXPRESS and ETP-TECHNO. The torque can be roughly selected for when the connection slips, by proper choice of hub/shaft tolerances and tightening torque. The connection can then be used as an overload protection with limited slipping.

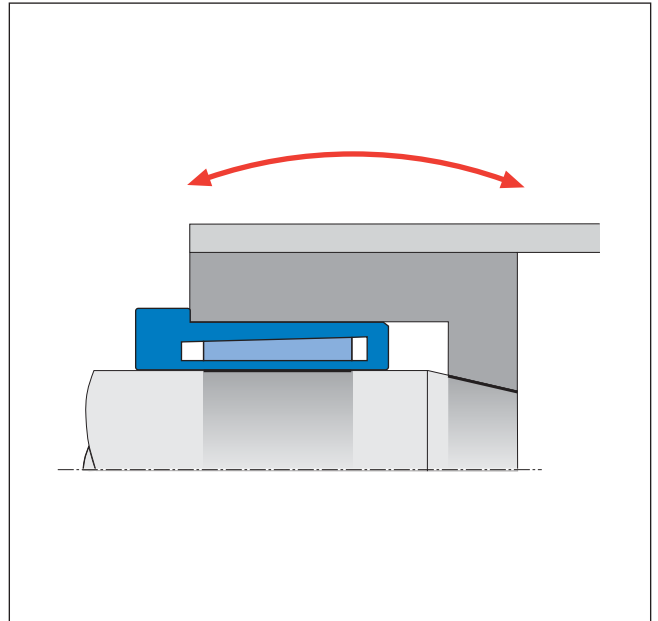

Long thin rollers subjected to high bending torque, can be fastened to stub shafts with ETP-HYLOC. To decrease the elastic deformation of the roller and make it easier to take up the bending torque, the inner part of the hub and the stub shaft can be designed with conical support surfaces. ETP-HYLOC gives good concentricity and fast changes.

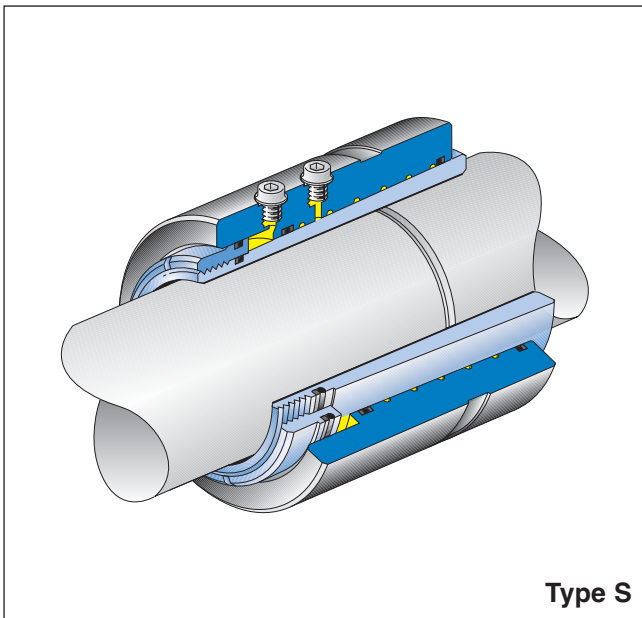

ETP-HYCON is a hydro-mechanical shaft-shaft (Type S) and shaft-flange (Type F) coupling for high torque and rigidity. The mounting is done, as for ETP-HYLOC, with an external pump. The design is type approved by for example DNV for use in the drive line for ships. Other important

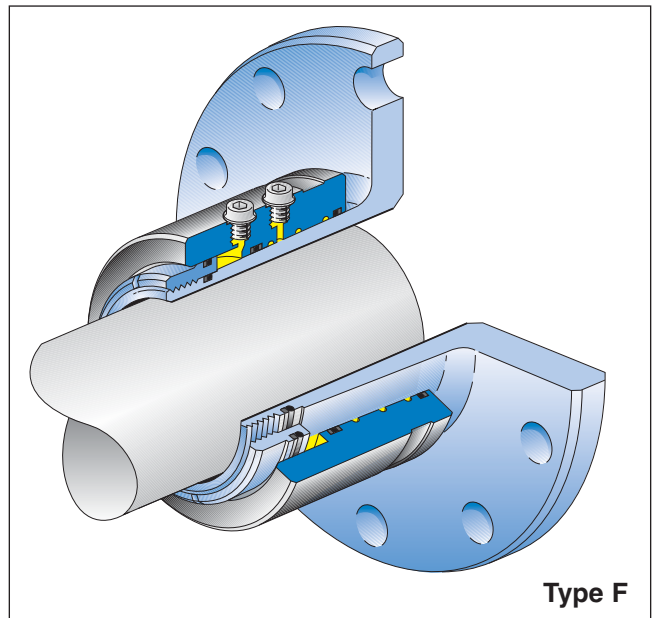

applications are in the steel-, paper- and other heavy industry, where the requirements are for high torque, low weight, high rigidity and short down time. **Separate brochure is available.**

ETP-CLASSIC type S

Notation ETP-CLASSIC S-XX

ETP-CLASSIC	Dimensions						Transmittable torque or axial force		Screws DIN 912, 12.9			Weight kg
	d mm	D mm	D ₁ mm	L mm	L ₁ mm	L ₂ mm	Tr Nm	Fr kN	No.	Dim.	Tt Nm	
S-19	19	28	45	13	26	31	53	5	3	M5	8	0,15
S-20	20	28	45	15	28	33	75	6	3	M5	8	0,14
S-25	25	34	49	15	29	34	120	10	4	M5	8	0,17
S-30	30	41	57	20	34	39	210	14	4	M5	8	0,24
S-35	35	47	63	22	38	43	330	19	6	M5	8	0,32
S-40	40	53	70	25	42	47	500	26	6	M5	8	0,46
S-45	45	59	77	28	45	51	700	31	6	M6	13	0,57
S-50	50	65	83	26	45	51	1000	40	6	M6	13	0,72

ETP-CLASSIC also has limited availability in a shorter version, type S, which is especially suitable for small hubs. The main dimensions are given in the table, for notations please refer to technical data for ETP-CLASSIC.

TOLERANCES

Shaft: h9 (for size 19: k6 – h8).
Hub: H7.

ETP-CLASSIC in inch

Notation ETP-CLASSIC XXX

ETP-CLASSIC	Dimensions						Transmittable torque or axial force		Screws DIN 912, 12.9		
	d tum	D mm	D ₁ mm	L mm	L ₁ mm	L ₂ mm	Tr Nm	Fr kN	No.	Dim.	Tt Nm
3/4"	3/4"	28	45	21	35	40	88	9,3	3	M5	8
7/8"	7/8"	32	49	22	37	42	135	12,1	4	M5	8
15/16"	15/16"	34	49	25	39	44	175	14,7	4	M5	8
1"	1"	35	51	27	41	46	195	16,2	4	M5	8
1 1/8"	1 1/8"	39	55	29	43	48	280	19,5	4	M5	8
1 3/16"	1 3/16"	41	57	32	47	52	340	22,5	4	M5	8
1 1/4"	1 1/4"	43	60	34	50	55	410	26,1	4	M6	13
1 5/16"	1 5/16"	45	63	35	52	58	475	28,5	4	M6	13
1 3/8"	1 3/8"	47	63	37	53	58	540	31,1	6	M5	8
1 7/16"	1 7/16"	50	65	37	54	59	580	31,8	6	M5	8
1 1/2"	1 1/2"	52	68	41	57	62	700	36,7	6	M5	8
1 5/8"	1 5/8"	55	70	44	63	68	850	41,2	6	M5	8
1 11/16"	1 11/16"	58	77	47	66	72	980	45,7	6	M6	13
1 3/4"	1 3/4"	59	77	49	67	73	1180	53,0	6	M6	13
1 15/16"	1 15/16"	65	83	52	74	80	1450	58,9	6	M6	13
2"	2"	68	88	53	74	80	1620	64,3	6	M6	13
2 3/16"	2 3/16"	74	92	58	83	89	2100	75,6	8	M6	13
2 7/16"	2 7/16"	81	99	60	85	91	2800	90,5	8	M6	13
2 1/2"	2 1/2"	84	107	62	86	94	3100	97,6	6	M8	32
2 15/16"	2 15/16"	95	118	85	108	116	5300	153,0	6	M8	32
3"	3"	98	121	74	101	109	5300	139,1	6	M8	32
3 7/16"	3 7/16"	110	132	90	121	129	7900	181,0	7	M8	32
3 15/16"	3 15/16"	125	148	110	139	147	12500	264,0	8	M8	32
4"	4"	130	155	97	128	136	12500	264,0	8	M8	32

ETP-CLASSIC is also available in a large assortment of inch sizes. The main dimensions are given in the table, for notations please refer to technical data for ETP-CLASSIC.

TOLERANCES

ETP-CLASSIC	Shaft tolerance
3/4"	0 till -0,0015"
7/8" – 1 1/2"	0 till -0,0020"
1 5/8" – 2 15/16"	0 till -0,0030"
3" – 3 7/16"	0 till -0,0040"
3 15/16" – 4"	0 till -0,0030"

ETP-CLASSIC	Hub tolerance
3/4" – 1 15/16"	0 till +0,0010"
2" – 2 7/16"	0 till +0,0012"
2 1/2" – 4"	0 till +0,0014"


ETP-HYLOC >220 mm

ETP-HYLOC	Dimensions					Transmittable torque* M kNm	Min. hub D _H mm	Polar moment of inertia J kgm ²	Weight kg
	d mm	D mm	D ₁ mm	L mm	L ₁ mm				
240	240	325	340	309	334	353	465	2,01	98
260	260	350	365	345	370	473	500	2,96	125
280	280	375	390	361	386	563	536	4,04	148
300	300	400	415	384	409	700	572	5,5	176
320	320	425	440	416	441	897	608	7,5	212
340	340	450	465	440	465	1053	644	9,88	248
360	360	475	490	464	489	1232	680	12,8	289
380	380	495	510	488	513	1461	707	15,5	317
400	400	515	530	511	536	1735	736	18,4	347

ETP-HYLOC is also available for shafts greater than 220 mm. These are manufactured acc. to the customers request. In the table the main dimensions and data are given for shafts up to 400 mm, these can be used as guide lines for the design work. For final dimensioning please contact us. Also bigger sizes can be offered.

* With ETP-HFC (High Fiction Coating) treatment of the bore of ETP-HYLOC.


ETP-UNIGRIP®

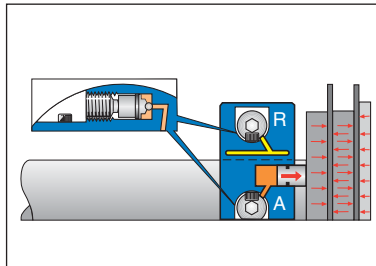

ETP-UNIGRIP has two separate hydraulic functions. When tightening the screw, R, ETP-UNIGRIP grips to the shaft. When tightening screw, A, 3 pistons are pressurized which creates a high axial force against the components which are going to be clamped.

ETP-UNIGRIP is an axial tensioner for clamping for example workpieces and tools against a shoulder on the shaft. It is available in a limited range of standard sizes for shafts 35 – 65 mm. **More information can be sent on request.** Special versions also with threaded inner diameter can be offered.

ETP-KN


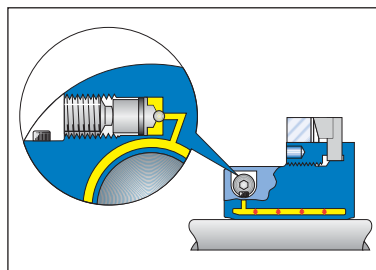


ETP-KN is designed acc. to the same principle as ETP-TECHNO but the expansion is only against the shaft. It is used for example for fastening of circular knives for slitting thin steel-plate when manufacturing beverage and food cans.


The knife is fastened with a nut or with screws onto the flange. ETP-KN gives excellent runout and repeatability as well as fast adjustment. It is only made to customer's specification. Shaft dimensions 50 – 200 mm. **Ask for separate information.**

Other types

With mainly ETP-TECHNO as a base, new customer specifications are continuously being designed. They solve specific fastening and centering problems. Here are some of the products shown which have been developed through our technician's close co-operation with customers, in order to create the optimal solution.

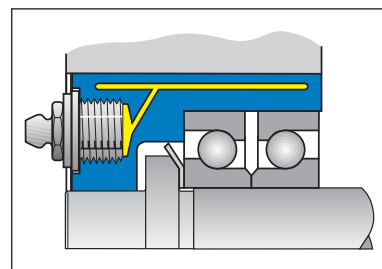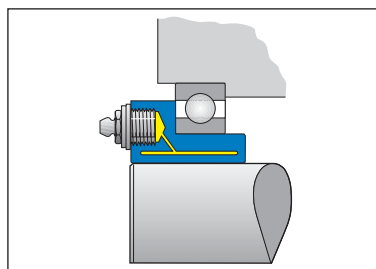

These ETP connections are designed to absorb the very small bearing play in a robot design. With the proper choice of tolerances and pressure in the connection, the precision and repeatability of the robot has been improved.

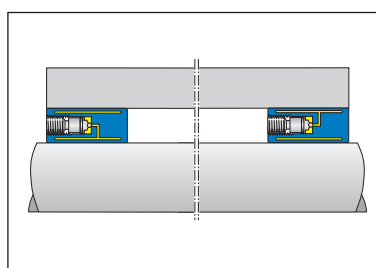

This ETP connection is used for fastening and centering a cylinder in a printing machine for beverage cans of aluminium. It has two separate pressure chambers, one for expansion to the shaft and one to the cylinder. The runout is better and the downtime shorter.

